









FEATURES AND FACTS:

- 40 racks / 160 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.
- Auto start/stop makes operation safe and easy.
- New integrated scrap tray prevents food soil from entering drain system.
- Airgap fill system.
- Field convertible from corner to straight or straight to corner.









Airgap fill system. Replaces vacuum breaker, eliminates internal parts failure and leaks



Integrated scrap tray prevents food soil from entering drain system.



Frame mounted motor. Easy service pump assembly.



Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.



Integrated tank, sump and drain system. No gaskets or hardware to deal with.










Chemical Sanitizing Single Rack Dishwasher

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

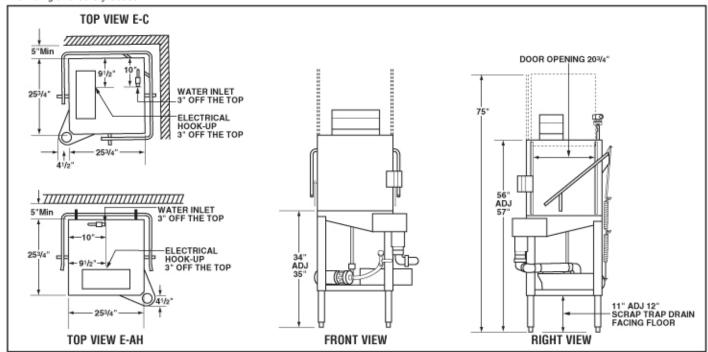

Specifications:

MODEL E-AH/E-C	USA	METRIC		USA	METRIC
OPERATING CAPACITY RACKS PER HOUR			WASH PUMP MOTORS HP	1	1
(NSF RATED)	40	40	DIMENSIONS		
OPERATING CYCLE			DEPTH	25-3/4"	(65.4cm)
WASH TIME-SEC	45	45	WIDTH	25-3/4"	(65.4cm)
RINSE TIME-SEC	30	30	HEIGHT		, ,
DWELL TIME-SEC	15	15		56"-57"	(142.2cm-144.8cm)
TOTAL CYCLE TIME	90	90	STANDARD	0.41	(00)
WASH TANK CAPACITY	1.7 GAL.	(6.45 L)	TABLE HEIGHT MAXIMUM CLEARANCE	34"	(86cm)
PUMP CAPACITY	52 GPM	(197 LPM)	FOR DISHES	17"	(43cm)
OPERATING TEMPERATURE			STANDARD DISHRACK	1	1
REQUIRED	120°F	(49°C)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
RECOMMENDED	140°F	(60°C)			
WATER CONSUMPTION			ELECTRICAL RATING	VOLTS	AMPS
PER RACK	1.7 GAL.	(6.45 L)	1	115	16
PER HOUR	74 GPH	(280 LPH)	1		
WATER REQUIREMENTS	FTWITT	1200 EFFI)			
WATER INLET	1/2"	(1.27cm)	SHIPPING WEIGHT		
DRAIN-I.P.S.	2"	1	APPROXIMATE	218#	(98.7kg)
DRAINT.F.O.	۷.	(5.1cm)			(0011118)

Summary Specifications: Model E-AH/E-C

CMA Energy Mizer model E-AH/E-C low temperature, chemical sanitizing commercial dishwashers meet NSF, UL and CSA sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model E-AH/E-C is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms.

Available Options

- Sanitizer Alarm
- Stainless Steel Dishtables
- Alternative cycle times
- Door Handle Conversion Kits E-AH To E-C P/N 00617.30 E-C To E-AH P/N 00617.20

