Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

DKM-500B_H

CRESCENT CUBER ICE MACHINE AND DISPENSER

SERENITY SERIES

DKM-500B_H
4/08
Item # 13225

DIMENSIONS
W x D x H

DKM-500B_H
30 x 28 x 77*
*with 6" legs
(or optional casters)



DKM-500

DKM-500BAH
Air-Cooled
Shown with optional
6" casters

DKM-500BWH
Water-Cooled

- Up to 466 lbs. of ice production per 24 hrs.
- Insulated polyethylene bin has a storage capacity of 200 lbs.
- 35% quieter compared to other hotel dispenser applications
- Durable, attractive one piece stainless steel exterior design
- One piece design allows for easy installation and serviceability
- Self-contained design reduces opportunities for cross contamination
- Protected by *HoshiGuard* Antimicrobial Agent HOSHIGUARD
- Push button operated; dispenses 13 lbs. of ice per minute
- 6" Flanged legs are standard
- Optional 6" casters available
- Water valve accessory as an option
- CycleSaver® design
- Complies with California Energy Commission guidelines (CEC)
- R-404A Refrigerant

* The DKM-500BAH is ENERGY STAR certified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts on: hermetic compressor, air-cooled fin and tube type condenser.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

DKM-500B_H CRESCENT CUBER ICE MACHINE AND DISPENSER
SERENITY SERIES

DIMENSIONS
W x D x H
DKM-500B_H
30 x 28 x 77*
*with 6" legs
(or optional casters)

- Air-cooled
- Water-cooled

AIR-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	466	448	420
	80°	453	425	395
	90°	448	406	376

WATER-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	455	450	419
	80°	451	444	399
	90°	450	439	399

STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
DKM-500BAH	200 lbs.	140 lbs.
DKM-500BWH	200 lbs.	140 lbs.

UTILITY CONSUMPTION

Model Number	Ice Production per Cycle		KWH per 100 LBS.		Potable Water Gallons per 100 lbs.
	Lbs.	Cubes	90/70	70/50	
DKM-500BAH	7.2	360	6.8	5.4	16.3
DKM-500BWH	7.5	360	5.1	4.9	26.7

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
DKM-500BAH	Air-Cooled	13.3	15	410 lbs.
DKM-500BWH	Water-Cooled	10.7	15	372 lbs.

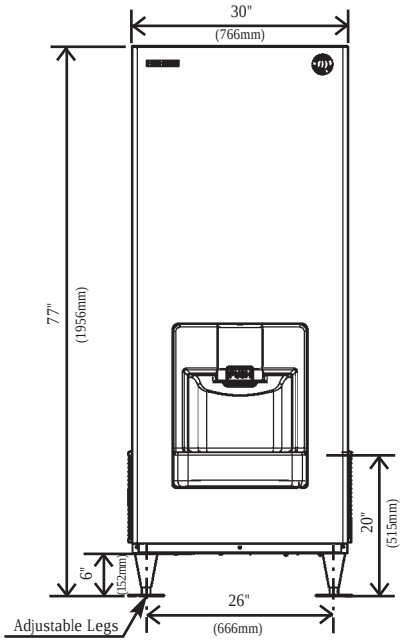

FRONT VIEW

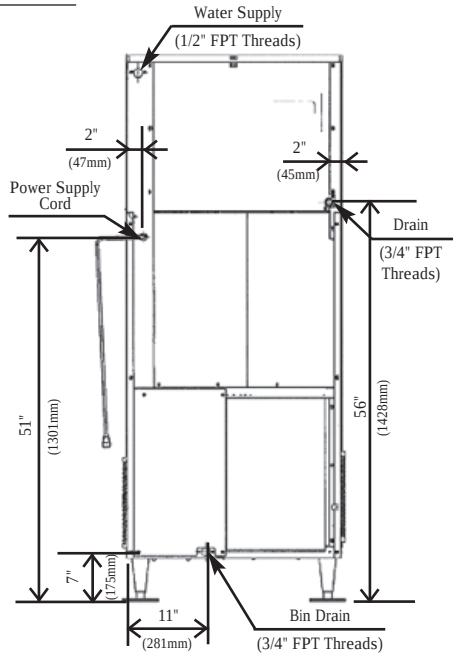

REAR VIEW (Air-Cooled Unit)



TOP VIEW

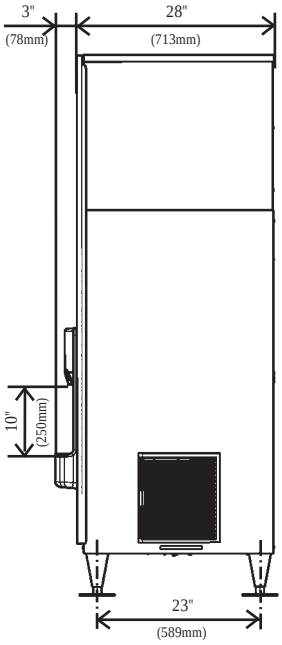

SIDE VIEW (Louver on Air-Cooled Unit)

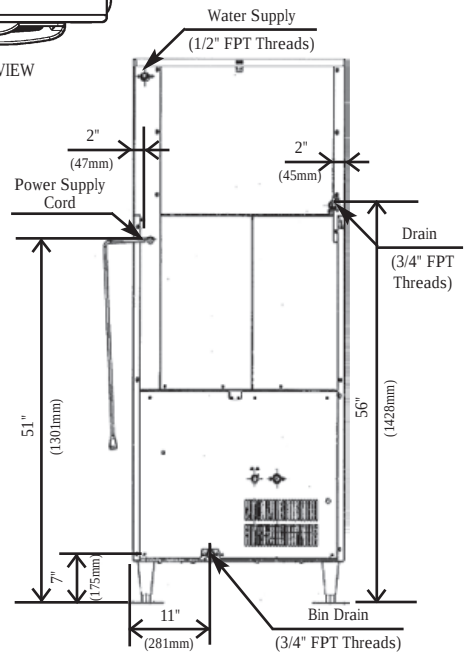

REAR VIEW (Water-Cooled Unit)

ELECTRICAL & PLUMBING/DKM-500B_H

- 115V/60/1
- 1/2" FPT Water Inlet
- 3/4 " FPT x2 Drain

OPERATING LIMITS

• Ambient Temp Range	45 - 100˚F
• Water Temp Range	45 - 90˚F
• Water Pressure	10 - 113psig
• Voltage Range	104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter. (Air-Cooled model only)

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.