Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

F-1500M_H

MODULAR FLAKER ICE MACHINE

F-1500M_H
8/06
Item # 13161

FLAKER DIMENSIONS
W x D x H

F-1500M_H
30 x 27 1/2 x 34 7/16

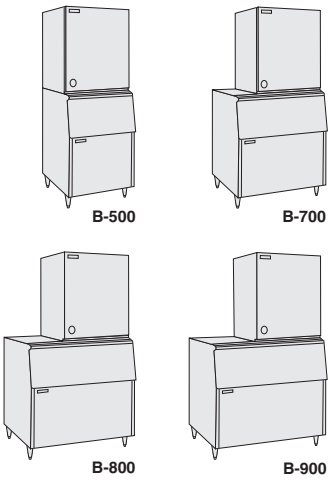

F-1500MAH
Air-Cooled
Shown on an optional
B-900

F-1500MWH
Water-Cooled

F-1500MRH
Remote Air-Cooled

- Up to 1590 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CleanCycle12® Design
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- R-404A Refrigerant

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.
Five Year - Parts on Compressor, air-cooled condenser coil.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

F-1500M_H FLAKER ICE MACHINE
MODULAR SERIES

Hoshizaki

DIMENSIONS
W x D x H
F-1500M_H
30 x 27 1/2 x 34 7/16

- Air-cooled
- Water-cooled
- Remote Air-cooled

AIR-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1590	1514	1447
	80°	1382	1321	1262
	90°	1206	1170	1100

WATER-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1435	1390	1360
	80°	1335	1310	1285
	90°	1260	1245	1210

REMOTE AIR-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1585	1532	1484
	80°	1439	1394	1351
	90°	1309	1300	1230

UTILITY CONSUMPTION

Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.
F-1500MAH	3.83	12.0
F-1500MWH	3.4	12.0
F-1500MRH	3.72	12.0

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-1500MAH	Air-Cooled	16.3	20	325 lbs.
F-1500MWH	Water-Cooled	15.9	20	325 lbs.
F-1500MRH	Air-Cooled Remote	18.9	20	325 lbs.

STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A



FRONT VIEW



SIDE VIEW



ICE DROP ZONE

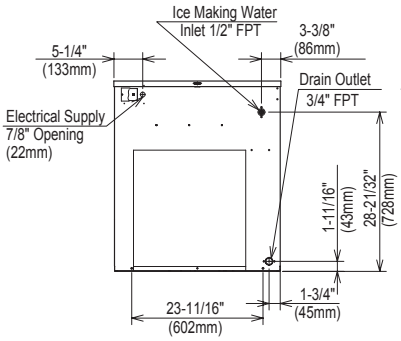

AIR-COOLED UNIT

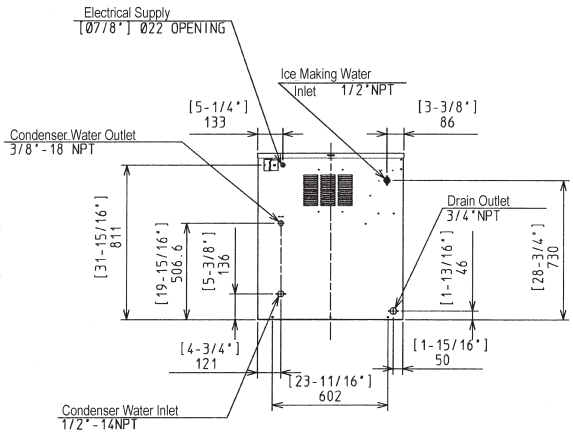

WATER-COOLED UNIT

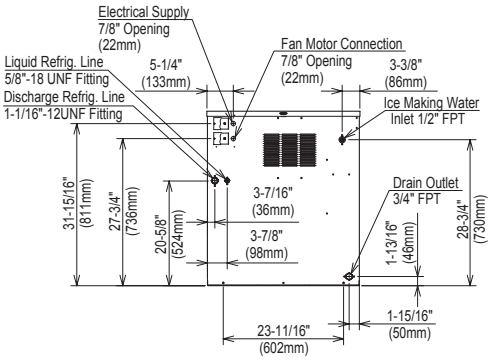

REMOTE AIR-COOLED UNIT

URC-12F Remote Condenser (Sold Separately)
For Use with F-1500MRH



Pre-Charged Tubing Kits
(Sold Separately)
20' R404-2068-2
35' R404-3568-2
55' R404-5568-2

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

ELECTRICAL & PLUMBING/F-1500M_H

- 208-230V/60/1 (3 wire with dedicated neutral for 115V)
- 1/2" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter. (Air-Cooled models only)

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.