Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

F-2000M_H(3)

MODULAR FLAKER ICE MACHINE

F-2000M_H(3)
8/06
Item # 13061

FLAKER DIMENSIONS
W x D x H

F-2000M_H(3)
30 x 27 1/2 x 34 7/16


B-500


B-700


B-800


B-900

F-2000MWH
Water-Cooled
Shown on an optional
B-900

F-2000MRH
Remote 1 Phase

F-2000MRH3
Remote 3 Phase

- Up to 2030 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CleanCycle12® Design
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- R-404A Refrigerant

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.
Five Year - Parts on: Compressor, air-cooled condenser.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

F-2000M_H(3)
MODULAR FLAKER ICE MACHINE

DIMENSIONS
W x D x H

F-2000M_H(3)
30 x 27 1/2 x 34 7/16

- Water-cooled
- Remote Air-cooled 1 Phase
- Remote Air-cooled 3 Phase

WATER-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	2030	1955	1915
	80°	1875	1835	1795
	90°	1760	1730	1685

REMOTE AIR-COOLED 1 PHASE

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1990	1930	1880
	80°	1825	1775	1730
	90°	1685	1675	1595

REMOTE AIR-COOLED 3 PHASE

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	2010	1950	1895
	80°	1845	1795	1750
	90°	1700	1695	1610

UTILITY CONSUMPTION

Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.
F-2000MWH	3.5	12.0
F-2000MRH	4.0	12.0
F-2000MRH3	4.1	12.0

SPECIFICATIONS

Model Number	Amperage	Min. Circuit Ampacity	Shipping Weight
F-2000MWH	16.9	30	350 lbs.
F-2000MRH	19.4	30	350 lbs.
F-2000MRH3	17.6	20	350 lbs.

STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A



FRONT VIEW



LEFT SIDE VIEW



RIGHT SIDE VIEW



ICE DROP ZONE

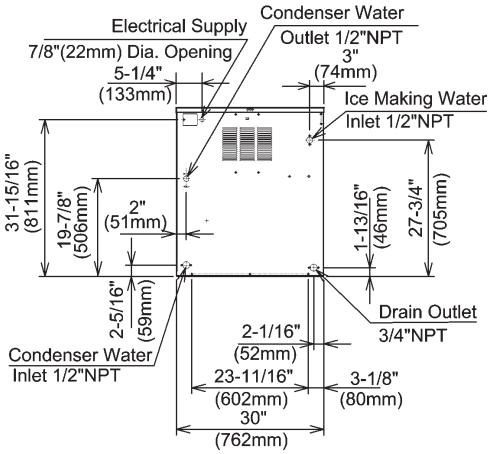

WATER-COOLED UNIT

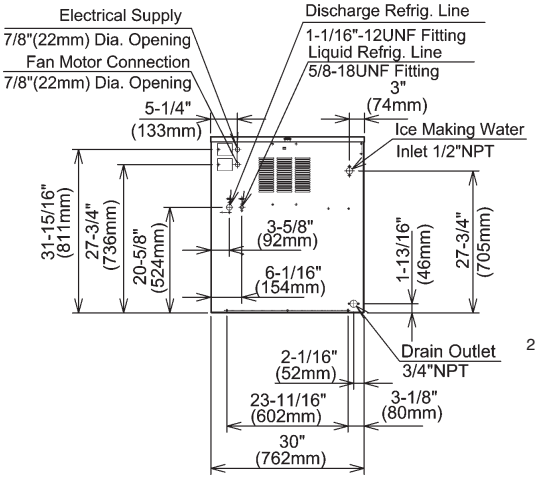

REMOTE AIR-COOLED UNIT

URC-20F Remote Condenser (Sold Separately)
For Use with F-2000MRH / F-2000MRH3



Pre-Charged Tubing Kits
(Sold Separately)
20' R404-20610
35' R404-35610
55' R404-55610

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

ELECTRICAL & PLUMBING/F-2000M_H(3)

- 208-230/60/1 (3 wire dedicated neutral for 115V)
- 3/8" OD copper or equivalent independent water supply
- 3/4" FPT independent drain connection

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.