Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

FS-1001MLH-C

SERENITY SERIES

CUBELET ICE MACHINE

FS-1001MLH-C
9/06
Item # 13165

CUBELET DIMENSIONS
W x D x H

FS-1001MLH-C
30 x 11 x 26

CONDENSING UNIT DIMENSIONS
W x D x H

Installation Dimension
SRC-10H
$30^{1/4}$ x $25^{3/8}$ x $34^{7/8}$*
*with legs

Actual Dimension
SRC-10H
$28^{1/4}$ x 23 x $19^{7/8}$



FS-1001MLH-C

FS-1001MLH-C
Remote Air-Cooled
Shown

- Up to 830 lbs. of ice production per 24 hours
- Less heat in the kitchen
- Minimized noise
- No wires between units
- Durable stainless steel exterior
- Individual cubelet ice
- Small chewable ice
- Ice removed from evaporator after every shut down cycle
- CleanCycle12® Design
- Slim depth - easier to clean dispenser
- Front or back serviceability
- R-404A Refrigerant

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Two Year - Parts & Labor on entire machine.
Five Year - Parts on compressor.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

FS-1001MLH-C CUBELET ICE MACHINE
SERENITY SERIES

DIMENSIONS
W x D x H

FS-1001MLH-C
30 x 11 x 26

Installation Dimension
SRC-10H
30 1/4 x 25 3/8 x 34 7/8*
*with legs

Actual Dimension
SRC-10H
28 1/4 x 23 x 19 7/8

REMOTE AIR-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	830	805	785
	80°	765	750	730
	90°	710	705	680

UTILITY CONSUMPTION

Model Number	Approximate Electrical 90/70	Approximate Electrical 70/50	KWH per 100 LBS. 90/70	KWH per 100 LBS. 70/50	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
FS-1001MLH-C with SRC-10H	1745	1713	5.96	4.94	12	N/A

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
FS-1001MLH-C	Remote Air-Cooled	15	15	166 lbs.
SRC-10H	Air-Cooled	20	20	169 lbs.



FRONT VIEW

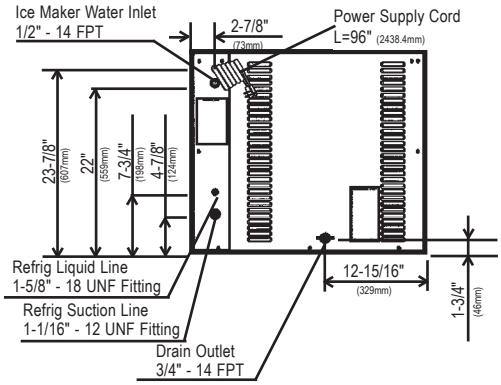

SIDE VIEW



ICE DROP ZONE

SRC-10H Remote Condensing Unit (Sold Separately)
For Use with FS-1001MLH-C

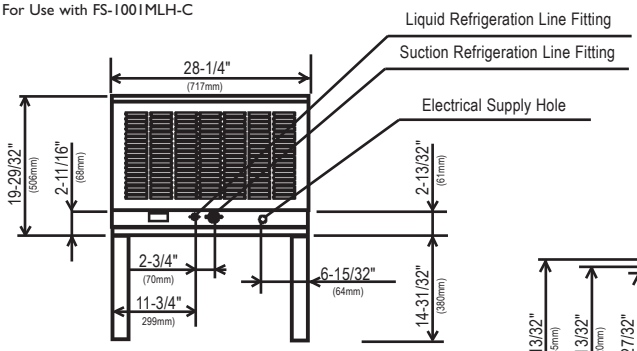

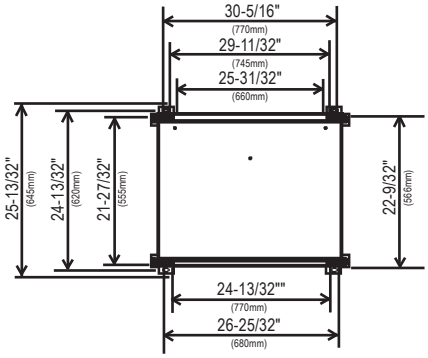

Pre-Charged Tubing Kits
(Sold Separately)
- 20' R404-20410
- 35' R404-35410
- 55' R404-55410

ELECTRICAL & PLUMBING/FS-1001MLH-C
- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- 1/2" FPT copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

CONDENSING UNIT/SRC-10H
- 208-230V/60/1
- 20 amp Max Fuse/HACR Breaker Size

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	104 - 127V

CONDENSING UNIT

• Voltage Range	187 - 253V
• Ambient Temp Range	-4 - 122°F

SERVICE
- Panels easily removed and all components accessible for service.
- No wires between units
- Pump down cycle

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.