

"Your Solutions Partner"

Specifications

F.O.B Sedalia, Missouri 65301



OPTIONS:

- 2-speed fan
- Natural or Propane
- Casters

AGENCY LISTINGS:







DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314-231-1130 In Missouri 314.231.5074 Fax www.dukemfg.com

| Approval Stamp(s): | | | | |
|--------------------|--|--|--|--|
| | | | | |
| | | | | |
| | | | | |

| PRODUCTI | NFORMATION: |
|-----------|-------------|
| PROJECT: | |
| ITEM: | |
| QUANTITY: | |
| | |

MODEL:

Duke Convection Ovens
"E" Series - Single Section - Gas

□ **E101-G** Single section standard depth

STANDARD FEATURES:

- 5 racks
- Porcelain interior
- Stainless steel front
- 27" angular painted legs

OVEN SECTIONS:

- Stainless steel front
- Painted sides, top
- 50/50 stainless steel doors
- Double pane glass in both doors
- 1-1/2" insulation on bottom, sides & back
- 3" insulation on top
- Interior lights

OVEN CONTROLS

- Power off/cook switch
- Dial type thermostat 200° 500°F
- 1-hour dial timer, electric buzzer


SHORT FORM SPECIFICATIONS:

Duke Convection Ovens - "E" Series -Single Section - Gas. Unit shall have stainless steel exterior front, painted sides and top. Bottom, back and sides to be fully insulated with 1-1/2" thick board type insulation, top to have 3" thick insulation. Interior shall be porcelain enameled interior, with 7/8" radius, coved corners. Each section to include five oven racks. Each oven section to be powered by 40,000 BTU, high output atmospheric burner system. Ignition system is accomplished with an electronic pilot relight system. Oven shall be furnished with a main gas shut off valve in the control panel area. A built-in gas regulator is standard. Unit to be completely front serviceable. Controls shall be: Power off/cook switch, dial type thermostat to operate from 200° - 500°F, and a 1-hour dial timer with electric buzzer. Builtin gas regulator. Door shall be 50/50 independent stainless steel. Insulated, and hinged on 5/8" solid stainless steel shafts with oil impregnated bronze bushings for each door. Double pane glass in both doors standard. Door to have roller style latch and catch mechanism. Legs shall be angular, painted 27" high, with adjustable feet. Units shall have the following options: 2-speed fan & casters. Limited 1 year warranty on parts and labor.

DUKE CONVECTION OVENS "E" SERIES - SINGLE SECTION - GAS

■ *E101-G* Single section, standard depth

| Gas Specifications | |
|--------------------|--|
| | |

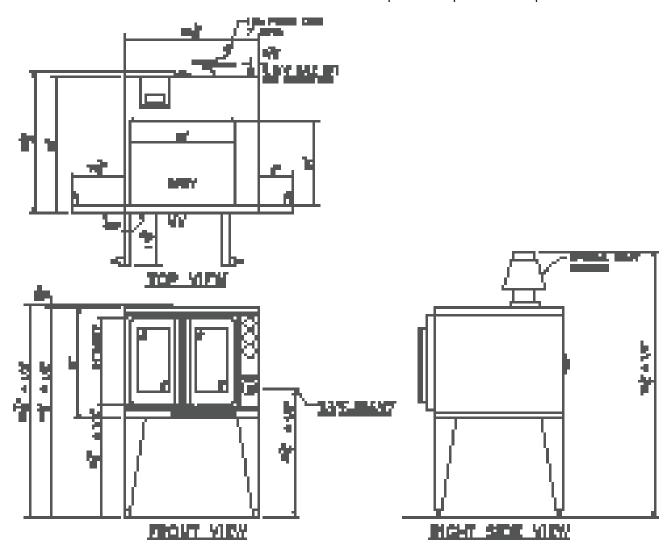

DIMENSIONS:

| DIMENSIONS: | | | | | FREIGHT CLASS: 85 | | | | |
|-------------|--------|-------|-------|------|-------------------|-------|---------------|--------|-------|
| | Depth | | Width | | Height | | Cube | Weight | |
| Model | in | cm | in. | cm | in. | cm | ft. crated | lbs | kg |
| E101-G | 39-1/2 | 100.3 | 38 | 96.5 | 60 | 152.4 | 59.6 | 540 | 245.0 |

Specify gas type

Specify altitude over 2000 feet



DUKE MANUFACTURING CO.

2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314.231.5074 Fax www.dukemfg.com

06/08 Printed in U.S.A © 2008, Duke Manufacturing Co.



"Your Solutions Partner"

Specifications

F.O.B Sedalia, Missouri 65301



V Control



ZZ Control



XX Control

AGENCY LISTINGS:





DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314-231-1130 In Missouri 314.231.5074 Fax www.dukemfg.com

| Appı | oval Stamp(s): |
|------|---|
| | |
| PRO. | TITY: |
| Acc | Convection Ovens ssories and Options |
| OVEN | CONTROLS: |
| Į | "V" - Basic snap action thermostat (200° - 500°F), 60 minute electric dial timer with continuous sounding buzzer, 2-speed fan |
| [| "XX" - Solid state digital time and temperature controls, 12-hour countdown timer, Cook and Hold feature, 2-speed fan, Pulse fan capability |
| Į. | "ZZ" - 10 programmable menu buttons, 5-rack ID timers, computerized digital time and temperature controls, Cook and Hold feature, 2-speed fan, Pulse Fan capacity - Not Available On Gas Ovens |
| | PTIONS: |
| - | or Gas and Electric Convection Ovens |
| | Stainless steel interior8" or 27" stainless steel angular legs |
| - | Open leg base, stainless steel, w/rack guides |
| | Double stacked ovens - shipped assembled |
| Į | Stainless steel back enclosure panel |
| | 1 Casters |
| | 3 Seismic feet |
| • | Field stacking kit |
| | Porcelain drip tray Extra oven racks - standard and deep depth |
| | Extra oven racks - standard and deep depth Prison package - tamper proof screws, lexan hinged covers with |
| ` | lockable clasp |
| [| Extended warranty |
| , | or Gas Ovens Only |
| | 48" flexible disconnect, with restraining device |
| | Down draft hood |
| | Flue deflector |
| Į | Common gas manifold |
| ı | or Electric Ovens Only |
| | High voltage - 380/415/440/480 |

SHORT FORM SPECIFICATIONS:

Duke Convection Ovens - Accessories and Options. Three (3) control panels for electric 613, 613Q & 59-E series ovens, 2 oven control panels for gas 613 & 613Q series oven. Only "V" oven controls for E101 and E102 series ovens. Baking Station and Baking Centers available with "XX" and "ZZ: control panels. See above for specific options regarding gas and electric convection ovens.

DUKE CONVECTION OVENS ACCESSORIES AND OPTIONS

OVEN CONTROLS:

- "V" Basic snap action thermostat (200° 500°F), 60 minute electric dial timer with continuous sounding buzzer, 2-speed fan
- "XX" Solid state digital time and temperature controls, 12-hour countdown timer, **Cook and Hold** feature, 2-speed fan, Pulse fan capability
- □ "ZZ" 10 programmable menu buttons, 5-rack ID timers, computerized digital time and temperature controls, Cook and Hold feature, 2-speed fan, Pulse Fan capacity







ZZ Control



XX Control



DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314.231.5074 Fax www.dukemfg.com