lamber

- Electronic ass-through dishwasher;
- Stainless steel construction 18/10AISI 304;
- **Wash cycle time: 1'-2'-3' minutes;**
- **Endless cycle : max 15 minutes;**
- Linear/Corner version;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Cycle start at hood closing;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- **Double skin self-washing slanted tank and hood with rounded edges;**
- Integral tank filter;
- Rinse aid dispenser;
- Detergent pump,
- Automatic tank loading;
- Hood opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;

c UL us LISTED COMMERCIAL DISHWASHERS 13CA

ANSI/NSF3




**SIZE:**
**26 3/8" W x 30 1/8" D x 57" H**
**Cycle period: 1'-2'-3' minutes**
**Capacity per hour:**
**Baskets/H 60/30/20**
**Dishes/H : 1080/540/360**
**Dishes per basket 12÷18**

# L25-s
# L25-dps

**Accessories:**
2 baskets for dishes;
1 generic basket;
2 cutlery containers;




**OPTIONS**
- Tank drain unit with filter (order DPS),
- Lateral entry/exit table with lower table 27,56 inch

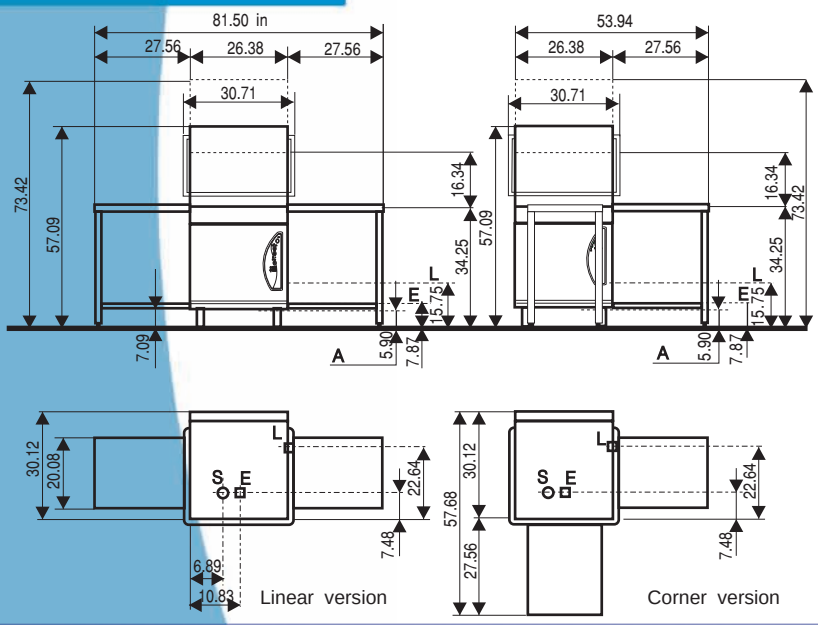


| Specifications | L25-s/dps | |
|---|---|---|
| VOLTAGE | 208 V3ph 60Hz | V |
| WASHING PUMP | 650 | W |
| WASH TANK ELEMENTS | 2000 | W |
| RINSE TANK ELEMENTS | 6000 | W |
| TOTAL RATING | 6650 | W |
| MAX CURRENT INTENSITY | 34 | A |
| PLATES CLEARANCE | 16,34 | inch |
| WORK HEIGHT | 34,25 | inch |
| TANK CAPACITY | 9 | Gal. |
| BOILER CAPACITY | 2 | Gal. |
| PUMP DELIVERY | 145 | Gal/min |
| WATER CONNECTION | 131 | °F |
| WATER CONSUMPTION PER CYCLE | 0,6 | Gal. |
| WATER CONSUMPTION PER HOUR | 15 | Gal. |
| WATER PRESSURE | 20±5 | psi |
| WATER HARDNESS | 5 ÷ 10 | TH(°F) |
| RINSING WATER TEMPERATURE | 179 ÷ 194 | °F |
| WATER INLET | 3/4" | "G |
| WATER OUTLET | 1"1/4 | "G |
| NET WEIGHT | 325 | Lbs |
| GROSS WEIGHT | 345 | Lbs |
| PACKING SIZE | /29,92xL33,86xH56,30 | inch |
| NOISE LEVEL | <60 | dB(A) |

The manufacturer reserves the right to make modifications of materials and models without warning.

lamber

Eurodib, 120 de la Barre, Boucherville, Qc, Canada, J4B 2X7
OR PO Box 1798, 1320 Route 9, Champlain, NY, USA, 12919
Tel: 1-888-956-6866 Fax: 1-877-956-6867
www.eurodib.com e-mail: shaun@eurodib.com

Z.I. Via Italia, 6 - 26855 Lodivecchio (LO) Italy
Tel. (0371) 753202 - 754248-9 Fax (0371) 752928
www.lamber.com - e-mail: info@lamber.it

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV
=ISO 9001/2000=