Project:
Location:
Item #:
Quantity:

Extra Wide Dual Temp Warmer/Refrigerator

HRS MODELS — Stainless steel exterior and interior.
HRS-1D-S7-EW
HRS-2D-S7-EW

HRSA MODELS — Stainless steel exterior. Aluminum interior.
HRSA-1D-S7-EW
HRSA-2D-S7-EW

Half Door, Pass-thru and Remote Models Available

HRS-1D-S7-EW

Standard Features

- Energy Saver Switches
- Stainless Steel Case Front and Doors
- Lifetime Heavy Duty Cam Lift Hinges
- Adjustable Wire Shelves
- Lifetime Safety Grip Handles
- Self Closing Doors with Safety Stops
- Flush-Mounted Automatic Interior Lighting
- Insulated Partition Wall Separates Compartments
- Energy Saving Thermal Breaker Strips
- Door Opening Accepts 12" x 20" and 18" x 26" Pans
- Heavy Duty Cylinder Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner, Refrigerator Section
- Stainless Steel Door Liner, Warmer Section
- Plasticized Fin Coil
- Cord and Plug Attached

Optional Features and Accessories

- Dial or Digital Thermometer
- Two Half Doors In Place of One Full Length Door on Two Section Model
- Full and Half Size Hinged Glass Doors with Cylinder Locks
- Adjustable Epoxy-Coated and Chrome Wire Shelves
- Stainless Steel Angle Pan Slides
- Stainless Steel Wire Pan Slides
- 5" Diameter Heavy Duty Swivel Casters with Brakes
- Stainless Steel Case Back
- Remote and Pass- Thru Models

Cabinet:

Victory's dual temperature model provides storage of both refrigerated and heated foods within a single cabinet. An insulated partition between the cabinet sections ensures temperature integrity of each product zone. The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency.

Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges which have a lifetime guarantee. Each door has a heavy duty cylinder lock and self-adjusting magnetic gasket to prevent the air from escaping. Humidity control wires located around the door jamb prevent condensation from forming on the cabinet front and are concealed by a high impact, non-conductive thermal breaker strip. The refrigerator section interior door liner is constructed of durable ABS material which resists denting and scratching and is easy to clean. The warmer section interior door liner is constructed of heavy gauge stainless steel. Each safety grip handle is guaranteed for life. Interior lighting is controlled automatically by a switch mounted in the hinge.

Shelving:

The heavy-duty wire shelves are adjustable in one-inch increments. A wide door opening allows the use of a variety of optional pan slide types for 12" x 20", 18" x 26", and 14" x 18" pans and trays.

Refrigeration System:

Each model is equipped with one self-contained independent refrigeration systems mounted on top of the cabinet. The air circulating fans and the forced convection cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient condensate evaporator, no plumbing is required.

Heating System:

Strip type 1000 watt heating elements for the one section and 1500 watt heating elements for the two section, operating on 208/240/60/1. An external blower system maintains even temperature through out the food zone area. Manually controlled humidity vents are provided in the top of the cabinet.

Approvals:

Victory Refrigeration specification sheets are available online at www.victory-refrig.com.

Victory Refrigeration, Inc. I 110 Woodcrest Road I Cherry Hill, NJ 08003 USA I Phone: 856.428.4200 I Fax: 856.428.7299 I E-mail: sales@victory-refrig.com

CHARACTERISTICS	ONE SECTION		TWO SECTION	
	Reach-In	Pass-Thru	Reach-In	Pass-Thru
Width, Overall	31 1/4	31 1/4	58 3/8	58 3/8
Depth, Overall (incl. handles)	35 7/8	39 3/8	35 7/8	39 3/8
Height, Overall (incl. adj. legs)	84	84	84	84
Depth, Door(s) Open 90°	60	87 5/8	60	87 5/8
Clear Door Width	22 1/2	22 1/2	22 1/2	22 1/2
Clear Half Door Height	25 3/8	25 3/8	25 3/8	25 3/8
Capacity Net (cubic feet)	21.5	23.7	46.5	48.0
No. of Half Doors	2	4	4	8
No. of Shelves (Warmer - chrome)	2	2	3	3
No. of Shelves (Refrigerator - epoxy)	2	2	3	3
Shelf Area (square feet)	17.69	17.69	25.77	25.77
Cabinet Voltage	208-240/60/1	208-240/60/1	208-240/60/1	208-240/60/1
Cord and Plug	14-20P	14-20P	14-20P	14-20P
Condensing Unit Voltage (Refrigerator)	115/60/1	115/60/1	115/60/1	115/60/1
Condensing Unit Size (Refrigerator HP)	1/3	1/3	1/3	1/3
Heater Watts per Section (@230V)	1000	1000	1500	1500
Total Amperes	14.0	14.0	15.6	15.6

Crated dim. & wts.	Ht.	Width	Depth	Cu.Ft.	Lbs
One Section	87	36 1/2	44 3/4	82.2	575
Two Section	87	63 5/8	44 3/4	143.3	935

Dimensional tolerance ± 1/4" Metric dimensions (MM)

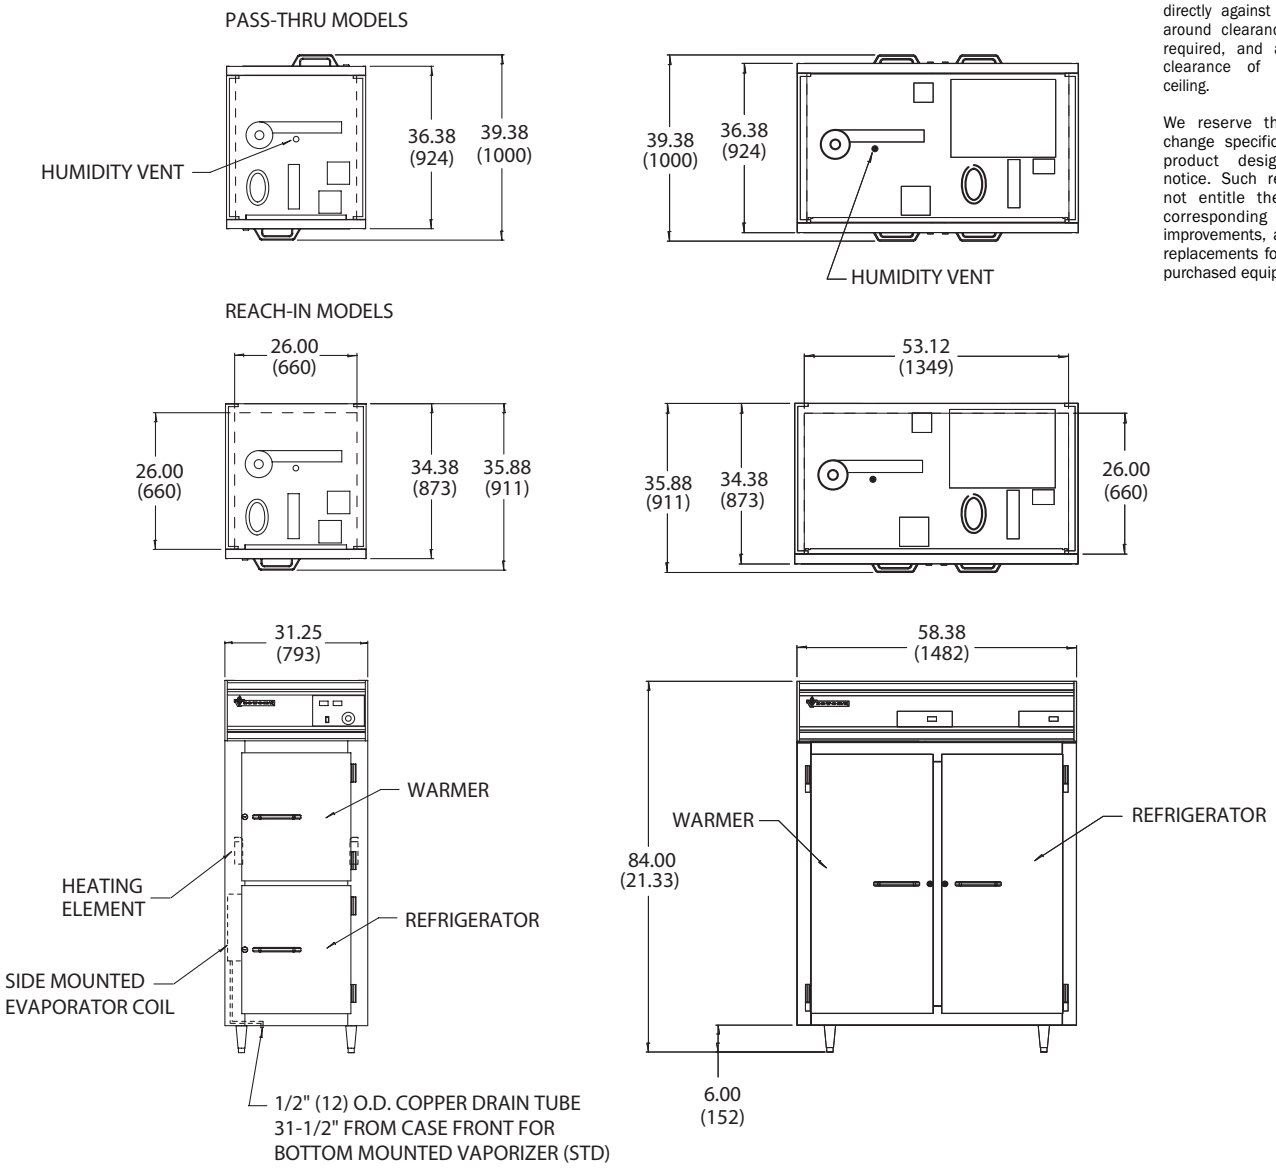

NOTE: If cabinet is located directly against wall an all around clearance of 2" is required, and a minimum clearance of 10" under ceiling.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification changes and design without notice.

Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.

Copyright June 2009
Printed in U.S.A. 063009