Item_____

REFRIGERATED SELF-SERVE HIGH PROFILE DAIRY MERCHANDISER

MODEL RSSD-478SC RSSD-678SC RSSD-878SC

Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits. Available in lengths of 4' and 6'.

STANDARD FEATURES

- Four tiers of adjustable white metal shelves with price tag molding. Shelves can be flat or slanted.
- Top mounted octron shielded light. Vertical lights optional.
- Choice of six standard laminates on exterior. Other color laminates optional. Black metal front grill and galvanized back.
- Silver trim, gold tone, and black optional.
- Stainless steel display deck, white interior ends and back panel, black optional.
- Automatic defrost.
- Condensate evaporator provided for a totally self-contained system.
- Insulated with high-density urethane foam.
- Continuous line-ups are available for remote applications.
- Refrigeration controls maintain 35° F to 40° F. Note: Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from wall.
- Thermometer.

REFRIGERATED
SELF-SERVE DAIRY MERCHANDISER

OPTIONAL ACCESSORIES:

* Special Laminate
* Mirrored Stainless Steel Ends
* Security Night Cover
* Wire Shelves in Lieu of Flat Metal
* Joining Kit for Continuous Line-ups
* Remote Condensing Unit
* Front Condensing Unit Air Discharger
* Rear Access Doors
* Vertical End Lights
* Energy Saving Night Curtain
* Gold or Black Trim
* Black Interior
* Casters (Self-Contained Models Only) Cord Included
* Cord & Plug (Self-Contained Models Only) (NEMA C14-20)
* Legs

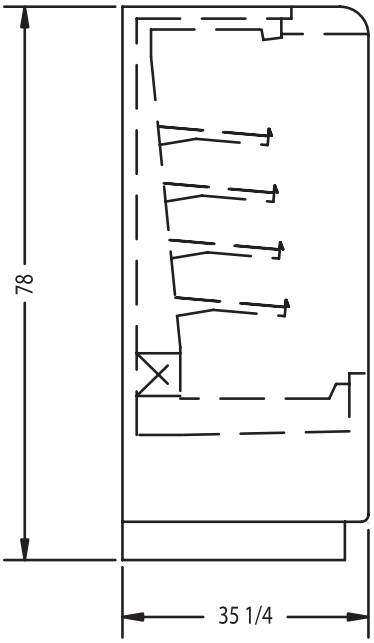

SIDE VIEW

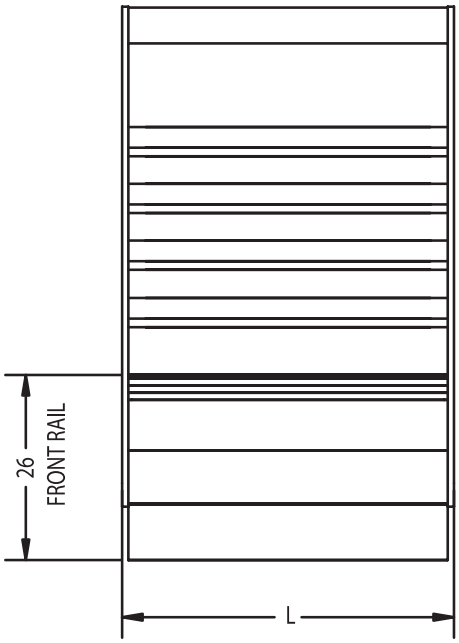

FRONT VIEW

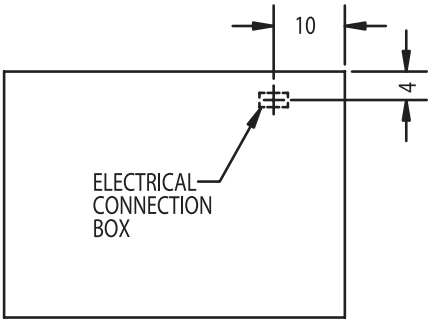

PLAN VIEW

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained 3-Wire Plus Ground 120/208-240/60/1	Remote 120/60/1
RSSD-478SC	47 1/4" x 34 1/4" x 78"	850	4 (15" x 45")	3/4 HP - 13 AMPS	12 AMPS
RSSD-678SC	71 1/4" x 34 1/4" x 78"	1,220	8 (15" x 45")	1 HP - 15 AMPS	13 AMPS
RSSD-878SC	91 3/16" x 34 1/4" x 78"	1,590	8 (15" x 45")	1.5 HP - 14 AMPS	14 AMPS

- Case temperature will vary if the air curtain is disrupted.
- The rear of the unit needs to be 6" from a wall.
- Electrical Requirement - The minimum circuit ampacity and maximum fuse size is 20 amps. A 120/208-240 volt, 60 hertz, 1 phase, 3 wire plus ground power supply.
- Refrigerated cases are designed to operate in an environment of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.

Look to Federal for Innovative Merchandising

Federal Industries
A Standex Company
215 Federal Avenue
Belleville WI 53508-0290
Phone: 800-356-4206
Fax: 608-424-3234
Email: geninfo@federalind.com
Web Site: www.federalind.com