SPECIFIER ITEM NO. _____

CHG PART NO. _____

Encore® Deck Mount Electronic Faucet with Temperature Control, Battery

K17 - 9000 - M

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61 / 9
Uniform Plumbing Code
ADA

ENGINEERING SPECIFICATION:

Single-hole deck mount, chrome plated, battery operated electronic faucet with mixing valve for temperature control and manual on/off. Electronic valves and batteries are housed above deck in solid, metal housing. Faucet includes (2) 3/8" braided stainless steel supply, inline check valves, (2) inline cleanable filters, self-adapting sensor, 0.5 GPM aerator and SANIGUARD® treated mixing valve handle.

TECHNICAL/PERFORMANCE SPECIFICATIONS:

Commercial Specification Grade
Operating Temperature: 40 - 140°F
Operating Pressure: 5 - 125psi
3/8" Compression female inlet
Vandal resistant housing hardware
In-line check valve w/cleanable filter included
Black plastic trim ring included
Self-Adapting Sensor Distance Adjustment
30 Second time-out feature
1 Second shut-off delay
Uses 4 AA Alkaline batteries (included)
1 1/4" mounting hole required
Above the deck Temperature mixing control w/ SANIGUARD® treated mixing valve handle.

OPTIONS:

K16-0004 4" Cover plate for vandal resistant three point anchoring
K16-0008 8" Cover plate for vandal resistant three point anchoring

Aerators:

KN50-X203-A 0.5 GPM PCA spray vandal proof
KN50-X203-F 1.5 GPM max. laminar vandal proof
KN50-X121-A 0.5 GPM PCA spray
KN50-X121-F 1.5 GPM max. laminar
KN50-X121 2.2 GPM max. aerated stream

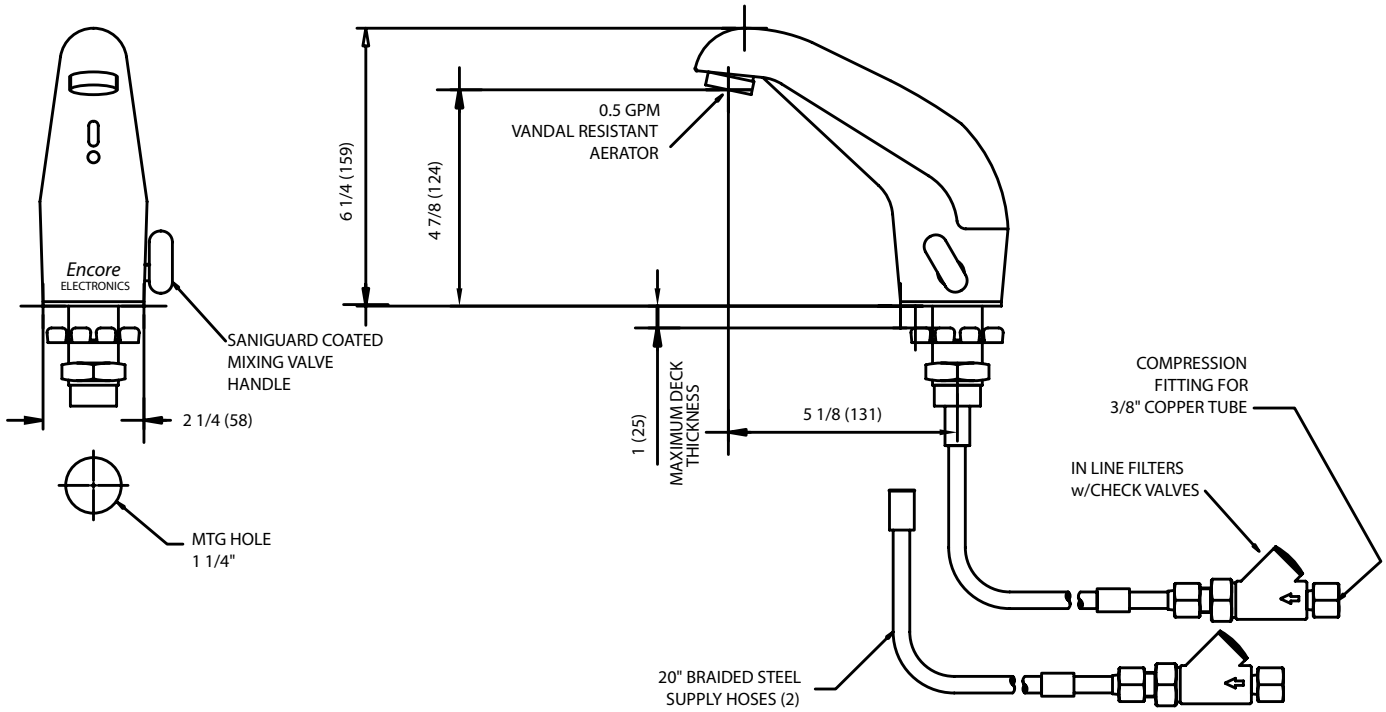

Dimensions shown in inches (mm) are for reference only and are subject to change.

1890 Swarthmore Avenue, PO Box 2020, Lakewood, New Jersey 08701 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.chgusa.com