Howard-McCray

GSR Series - Reach In Sliding Glass Door Refrigerators - Top Mount

• PRODUCT SPECIFICATIONS SHEETS

Shown with hinged glass doors

• Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

Self-Contained Remote	GSR48 R-GSR48	GSR75 R-GSR75	GSR102 R-GSR102
Length	52-1/4	78"	103-3/4"
Height with casters	83"	83"	83"
Depth with drain cover	34-3/4"	34-3/4"	34-3/4"
(Dimensions are +/-1/4")			

• Specification subject to change without notice

Howard-McCray

GSR Series - Reach In Sliding Glass Door Refrigerators - Top Mount

Standard Specifications and Optional Features

CONSTRUCTION UL Classified to ANSI/NSF 7 Heavy duty construction CFC free foamed in place insulation Removable front grille for easy servicing 2, 3 and 4 door models available Heavy duty easy glide sliding doors	**FINISHES** Doors-Black vinyl extrusion Exterior-designer white Interior-designer white Rear-coated galvanized
INTERIOR White aluminum ends and back White aluminum floor Aluminum evaporater fan housing 4 heavy duty epoxy coated shelves per door	**REFRIGERATION** Top mounted condensing unit R134a refrigeration 2 & 3 door-capillary tube 4 door-expansion valve Electric condensate pan Remote available
EXTERIOR White aluminum ends and fronts Double pane glass doors 24-3/4"X59-1/2" provides wide view display 5" casters Externally mounted dial thermometer	**LIGHTING** Vertical light behind mullion 2 Dr = 1 light 3 Dr = 2 lights 4 Dr = 3 lights
ELECTRICAL REQUIREMENTS 2,3 Door Units 115V/60Hz/1Ph Cord and plug 4 Door 115V/208-230V/60Hz/1Ph Unit must be hard wired UL/CUL listed	***Important Note:* All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.** ***Important Note:* Product must be cooled before being displayed within the case.**

OPTIONAL FEATURES

Stainless steel, laminate, or paint Digital thermometer Extra shelf with clips	Door locks 6" legs (black or stainless steel top mount units only)

A Division of HMC Enterprises LLC • 2501 Grant Avenue • Philadelphia, PA 19114 USA
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

Howard-McCray

GSR Series - Reach In Sliding Glass Door Refrigerators - Top Mount

Technical Data

Model #	Self contained	GSR48	GSR75	GSR102
	Remote	R-GSR48	R-GSR75	R-GSR102
Length **Height** **Depth with drain cover** **(Dimensions are +/- 1/4")**		52-1/4" 83" 34-3/4"	78" 83" 34-3/4 "	103-3/4" 83" 34-3/4 "
Operating temperature **Refrigerant** **System Type** **Compressor size- HP** **Refrigeration system** **BTU's at +20˚F Evap. Temp.** **Voltage** **Amperage** **Amperage** **Cord and plug**	 Self contained Self contained Remote Self contained Remote	38˚F to 41˚F R134a Capillary tube 1/3 Temperature Control 2300 115V 10.1A 2.5A Yes (15A)	38˚F to 41˚F R134a Capillary tube 1/2 Temperature Control 4400 115V 13.0A 3.3A Yes (20A)	38˚F to 41˚F R134a Expansion valve 3/4 Pressure control 5920 115/208-230V 6.4/7.1A 4.9A No
Exterior color **Interior color** **Inside end panels** **Floors** **Drain Electric Condensate** **Total shelves** **Door size** **Cubic capacity (ft³)**		White White White White Yes 8 24-¾"X59-½"(2) 48	White White White White Yes 12 24-¾"X59-½"(2) 26-15/16"X59-½"(1) 75	White White White White Yes 16 24-¾"X59-½"(4) 102

SHIPPING INFORMATION

Height Length Depth Gross weight Cubic feet	 Self contained Remote 	86" 58" 44" 490# 375# 118ft³	86" 84" 44" 715# 590# 171ft³	86" 109" 44" 950# 800# 223ft³

- **Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity**
- **Specification subject to change without notice**

A Division of HMC Enterprises LLC *• 2501 Grant Avenue • Philadelphia, PA 19114 USA*
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

Howard-McCray

GSR Series - Reach In Sliding Glass Door Refrigerators - Top Mount

Technical Data • Side View • Plan View

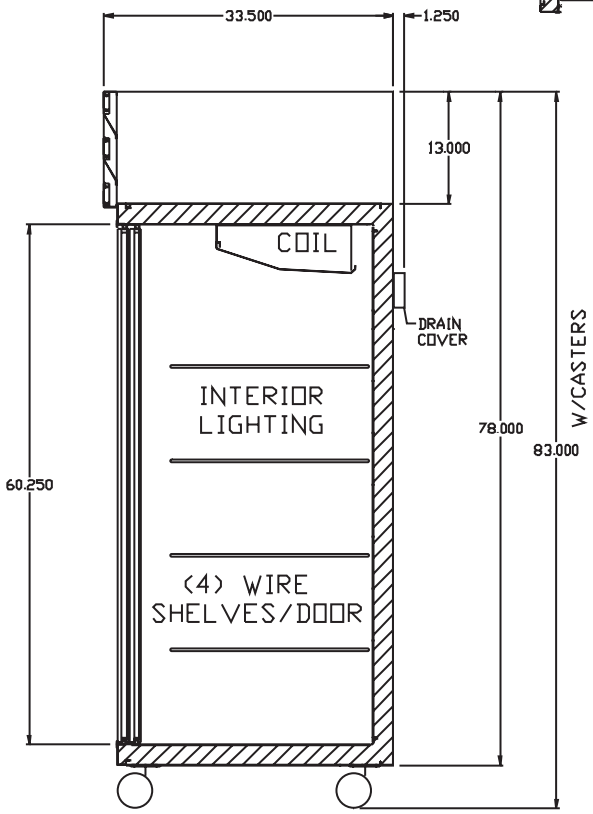

Cross Section

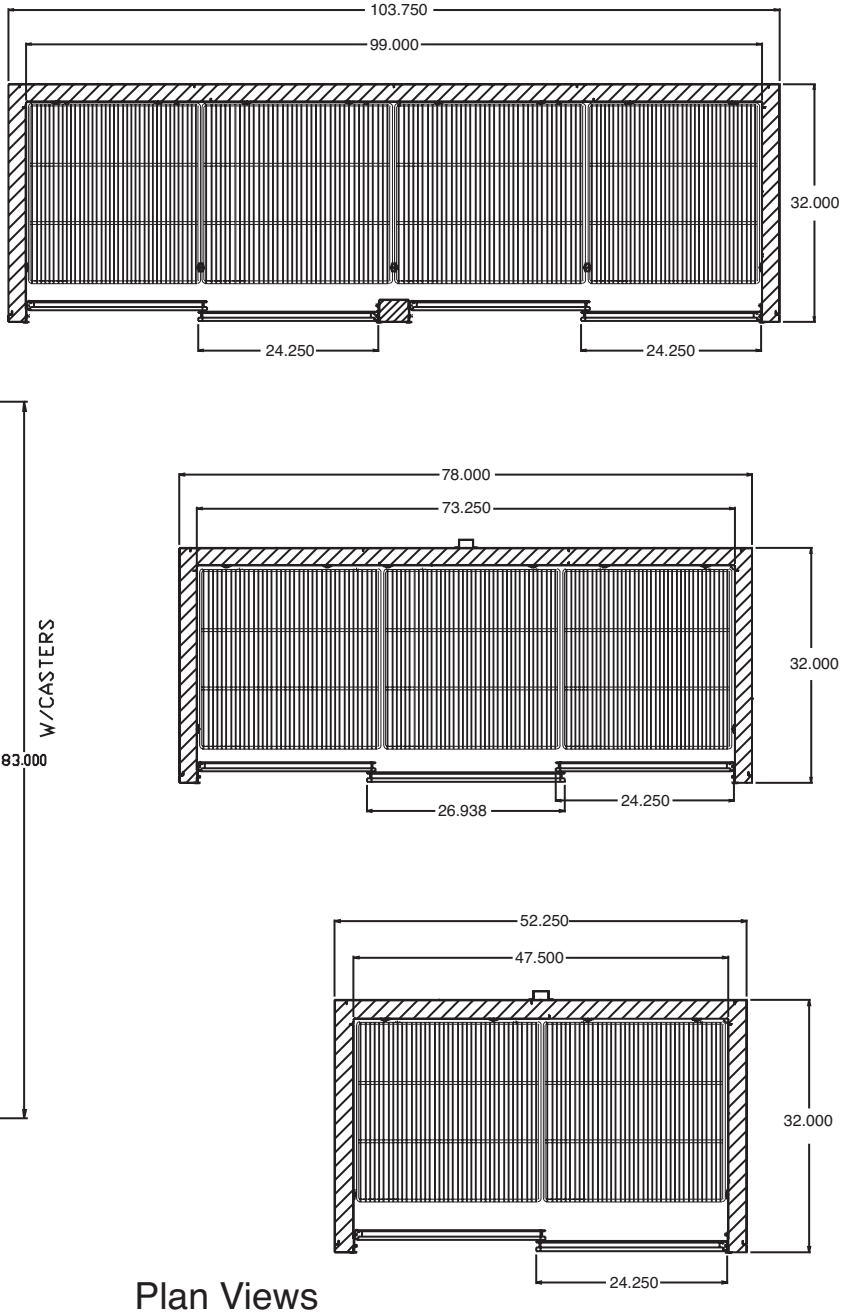

Plan Views

A Division of HMC Enterprises LLC • 2501 Grant Avenue • Philadelphia, PA 19114 USA
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com