Howard-McCray

32E Series – Endless Design
Curved Glass – Single Duty – Deli

• PRODUCT SPECIFICATIONS SHEETS

• Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

Self-Contained Remote	SC-CDS32E-4C-LS R-CDS32E-4C-LS	SC-CDS32E-6C-LS R-CDS32E-6C-LS	SC-CDS32E-8C-LS R-CDS32E-8C-LS
Length with (2) ends	50"	74"	98"
Length without ends	48"	72"	96"
Height with ends	50-1/2"	50-1/2"	50-1/2"
Height without ends	50"	50"	50"
Depth with ends	30-1/2"	30-1/2"	30-1/2"
Depth without ends	30"	30"	30"
Endless Design	YES	YES	YES

(Dimensions are +/- 1/4")

• Specification subject to change without notice

Howard-McCray

32E Series – Endless Design
Curved Glass – Single Duty – Deli

Standard Specifications and Optional Features

CONSTRUCTION UL Classified to ANSI/NSF 7 Foamed in place CFC free foam Double pane coated and insulated curved glass Heavy gauge steel super structure Single duty display Endless design allows for continuous line up Drain is included for cleaning	**FINISHES** Satin finish extrusion on doors and door tracks Designer white exterior front and ends Stainless steel mirror trim Stainless steel heavy gauge top – 16" W Rear of unit is stainless steel brush finish at top Bottom rear is designer white aluminum
INTERIOR Stainless steel mirrored upper ends Stainless steel heavy gauge lighted mezzanine shelf *(1 row)* White aluminum floor-main deck area Epoxy coated main deck shelves Air insulated baffle *(prevents moisture from dripping into display area)*	**REFRIGERATION** Copevap system *(eliminates need for condensate pan)* R134a expansion valve system Gravity coil located at inside top of unit Self contained system Automatic defrost controlled by time clock-*(self contained units only)* Pressure control maintains constant temperatures Remotes available
EXTERIOR Double pane rear removable doors Newly designed rear compression door jamb Removable front grille allows for cleaning Removable rear grille for easy servicing 1" removable end panels	**LIGHTING** 1 Row of T12 lighting at top of unit 1 Row of lighting on mezzanine shelf
ELECTRICAL REQUIREMENTS 115V/60Hz/1Ph Unit must be hard wired UL/CUL listed 115V-12AMP general purpose receptacle *(wired separately)*	***Important Note:* All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.** ***Important Note:* Product must be cooled before being displayed within the case.**

OPTIONAL FEATURES

Stainless steel, laminate or paint Mirrored doors Extra row of mezzanine shelf Digital Thermometer	Front bumper 1" or 3" Ice pans Sandwich rack Door Locks

c UL us LISTED

CLASSIFIED UL EPH ANSI/NSF 7

A Division of HMC Enterprises LLC • *2501 Grant Avenue • Philadelphia, PA 19114 USA*
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

Howard-McCray

32E Series – Endless Design
Curved Glass – Single Duty – Deli

Technical Data

Model #	Self contained	SC-CDS32E-4C-LS	SC-CDS32E-6C-LS	SC-CDS32E-8C-LS
	Remote	R-CDS32E-4C-LS	R-CDS32E-6C-LS	R-CDS32E-8C-LS
Length with (2) ends		50"	74"	98"
Length without ends		48"	72"	96"
Height with ends		50-1/2"	50-1/2"	50-1/2"
Height without ends		50"	50"	50"
Depth with ends		30-1/2"	30-1/2"	30-1/2"
Depth without ends		30"	30"	30"
Endless design		YES	YES	YES
(Dimensions are +/- 1/4")				
Operating temperature		36˚F to 40˚F	36˚F to 40˚F	36˚F to 40˚F
Refrigerant (expansion valve)	Self contained	R134a	R134a	R134a
Compressor size HP	Self contained	1/4	1/3	1/2
Pressure control settings @ 75˚F, 55%RH	CUT IN	30	30	30
	CUT OUT	12	12	12
Defrost per day (24 hours)	Air Defrost	1 per day	1 per day	1 per day
BTU's at +20˚F Evap. Temp.	Remote	1400	2100	2800
Voltage		115V	115V	115V
Amperage	Self contained	6.6A	9.7A	12.4A
Amperage, lights only	Remote	1.4A	2.2A	2.8A
Cord and plug		No	No	No
Exterior color		White	White	White
Interior color		Stainless Polish	Stainless Polish	Stainless Polish
Inside end panels		Stainless Bright	Stainless Bright	Stainless Bright
Floors		White	White	White
# of top doors		2	2	4
Door size		20-1/2"X23-1/2"	31"X23-1/2"	20-1/2"X23-1/2"
# of coils		1	1	1
Bottom storage		No	No	No
Front Glass		Curved	Curved	Curved
# of main deck shelves		2	3	4
Main deck size		23-5/8"X25"	23-5/8"X25"	23-5/8"X25"
Cubic capacity (ft^3)		23	34.5	46
Mezzanine, 1 row lighted		Standard	Standard	Standard

SHIPPING INFORMATION

Height		55"	55"	55"
Depth		44"	44"	44"
Length		61"	87"	115"
Gross weight	Self contained	500#	710#	940#
	Remote	460#	660#	910#
Cubic feet		85ft^3	122ft^3	161ft^3

- **Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity**
- **Cases are equipped with drains; check your local building codes for connection requirements.**
- **Specification subject to change without notice**

A Division of HMC Enterprises LLC *• 2501 Grant Avenue • Philadelphia, PA 19114 USA*
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

Howard-McCray

32E Series – Endless Design
Curved Glass – Single Duty – Deli

Technical Data • Side View • Plan View

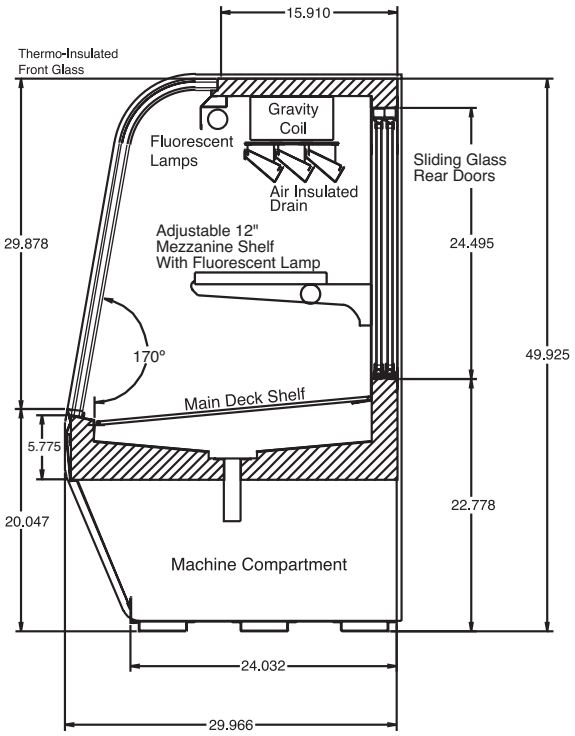

Cross Section

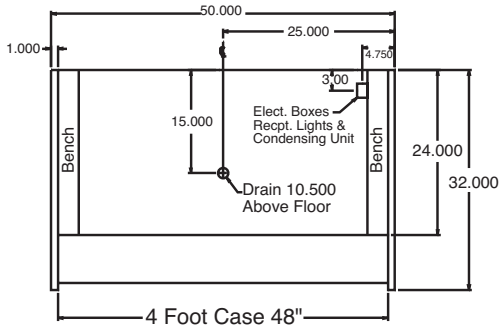

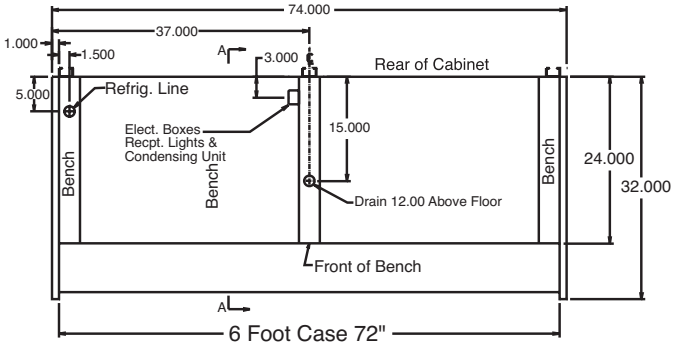



Side View

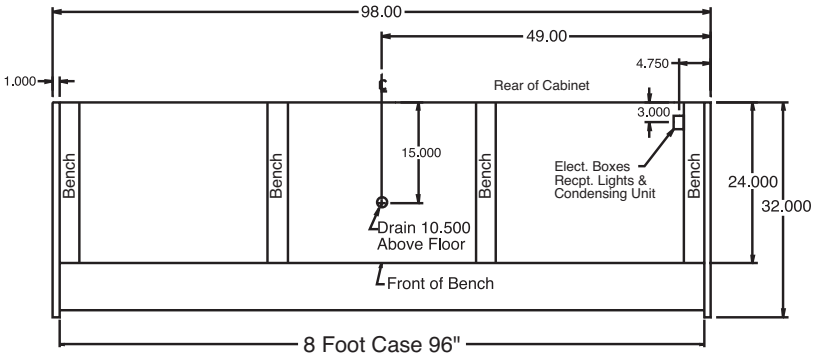

Plan Views

A Division of HMC Enterprises LLC *• 2501 Grant Avenue • Philadelphia, PA 19114 USA*

(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com