Solid & GlassDoor Reach-in Refrigerators/freezers

Project _____
Location _____
Item # _____
Qty _____

Value Series

Models:

- ☐ QVR-1 ☐ QVR-2 ☐ QVR-1G ☐ QVR-2G
- ☐ QVF-1 ☐ QVF-2 ☐ QVF-1G

Standard Features

- Stainless steel exterior and interior finish, ABS plastic interior door liner. S/S coved corner floor.
- CFC-Free polyurethane insulation - foamed in place.
- Oversized and balanced refrigeration system (R-134A Refrigerators / R-404A Freezers. Holds 33° F – 38° F Refrigerators / -8° F Freezers).
- Accepts all basic pan sizes including 18" x 26" bun pans.
- Digital controller refrigerators and freezers.
- Self closing doors stay open feature for convenient loading and unloading of products.
- Adjustable heavy duty epoxy coated wire shelves.
- 4" diameter swivel castors standard, front 2 with brakes.
- Bottom mount refrigeration system with service friendly slide out rail.
- Interior Incandescent light.

QVR-1 Shown

QVR-2 Shown

QVR-1G Shown

Intertek Intertek AutoQuotes

Conforms to UL and NSF-7 standards

REFRIGERATOR

Model	Doors	Capacity (Cu.Ft)	Shlvs.	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions L	Cabinet Dimensions D	Cabinet Dimensions H*	Shipping Wt.	Shipping Cubes
QVR-1	1	23 (651 litres)	3	4.7	1/4	115/60/1	5-15P	8′ (2.439mm)	27-3/4″ (705 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	280 (127 Kg)	51 (1.44 m³)
QVR-2	2	49 (1388 litres)	6	6.9	1/3	115/60/1	5-15P	8′ (2.439mm)	55-1/4″ (1.708 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	445 (201.8 Kg)	95 (2.69 m³)
QVR-1G	1	23 (651 litres)	3	4.7	1/4	115/60/1	5-15P	8′ (2.439mm)	27-3/4″ (705 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	300 (136 Kg)	51 (1.44 m³)
QVR-2G	2	49 (1388 litres)	6	6.9	1/3	115/60/1	5-15P	8′ (2.439mm)	55-1/4″ (1.708 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	475 (215.4 Kg)	95 (2.69 m³)

FREEZER

Model	Doors	Capacity (Cu.Ft)	Shlvs.	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions L	Cabinet Dimensions D	Cabinet Dimensions H*	Shipping Wt.	Shipping Cubes
QVF-1	1	23 (651 litres)	3	8.0	3/4	115/60/1	5-15P	8′ (2.439mm)	27-3/4″ (705 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	280 (127 Kg)	51 (1.44 m³)
QVF-2	2	49 (1388 litres)	6	11.2	1	115/60/1	5-15P	8′ (2.439mm)	55-1/4″ (1.708 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	445 (201.8 Kg)	95 (2.69 m³)
QVF-1G	1	23 (651 litres)	3	8.0	3/4	115/60/1	5-15P	8′ (2.439mm)	27-3/4″ (705 mm)	31″ (787 mm)	75-3/4″ (1.924 mm)	305 (138.4 Kg)	51 (1.44 m³)

* Height does not include 4" castors (5" overall) or 6" for legs.

FAGOR

Fagor Commercial, Inc.
13105 N.W. 47th Avenue
Miami, FL 33054 USA
Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173
Toll Free: 1 - 866 - GO FAGOR
www.fagorcommercial.com

QV Series

Solid Door & Glass Door Reach-in Refrigerators / Freezers

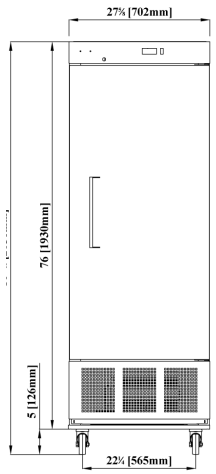

QVR(F)-1 FRONT

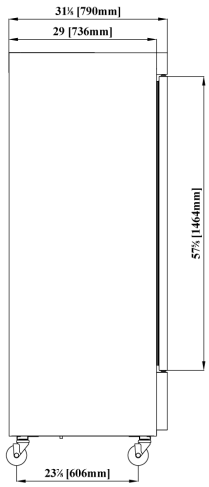

QVR(F) SECTION

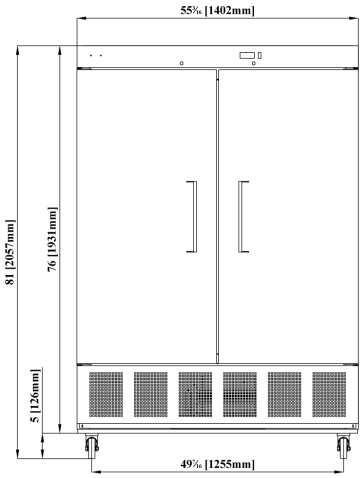

QVR(F)-2 FRONT

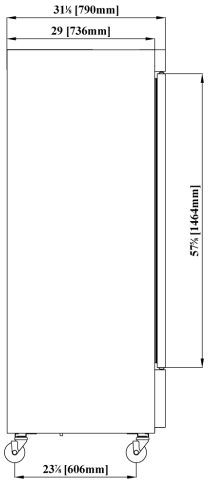

QVR(F) SECTION



QVR(F)-1 TOP



QVR(F)-2 TOP

Specifications

Construction: Heavy duty stainless steel front and sides. Aluminized top and back panel. Interior constructed of Stainless Steel interior walls and coved corner stainless steel floor.

Door is stainless steel exterior, step design ABS plastic interior with S/S hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self closing and with 90° stay open feature. Recessed door handle. Door heaters on freezers. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with 2″ CFC-Free polyurethane insulation, foamed in place. Three adjustable epoxy coated shelves provided per section. Interior fluorescent light activated by door rocker switch.

Glass door units have interior incandescent light with safety shield per section outside the food zone.

Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a freezers) Bottom mount condensing unit on a rail system for easy access. Epoxy coated evaporator coil is mounted to interior top panel encased in plastic / stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33°F to 38°F and freezers between 0°F to -10°F (QVF-1), 0°F to -8°F (QVF-2) during normal operations.

Digital display and controllers on both refrigerators and freezers. Automatic defrost, time initiated.

Others: Unit is supplied standard with a 8′ cord and plug (Nema 5-15p). 4″ diameter castors, front 2 with brakes.

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. and Canada only).

Accessories:
- ☐ 6″ adjustable legs (set of 4)
- ☐ Epoxy coated shelves with clips
- ☐ Factory reverse hinging
- ☐ S/S back panel
- ☐ Bun tray rack - Half door
- ☐ Bun tray rack - Full door
- ☐ 220 volts / 50 cycles / 1 phase

Fagor Commercial, Inc.
13105 N.W. 47th Avenue
Miami, FL 33054 USA
Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173
Toll Free: 1 - 866 - *GO FAGOR*

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice.

Printed in the USA • 05/10