



STAINLESS STEEL WALL SHELVES



Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____



FEATURES:

Brackets can be positioned to accommodate wall studs.
 Furnished with a 1-5/8" Bullnose edge with a 1-1/2" turn-up edge at rear. Ends are turned down square.

MATERIAL:

16 Gauge Series - 304 stainless steel polished to a satin finish.
18 Gauge Series - 430 stainless steel polished to a satin finish.

CONSTRUCTION:

Secured to wall by means of bolts through support brackets.
 Units 7 ft. and larger are furnished with 3 brackets.

| L | 10" Wide | | | 12" Wide | | | 15" Wide | | | 18" Wide | | | |
|------|--------------|-----------|-------------|--------------|-----------|-------------|--------------|-----------|-------------|--------------|-----------|-------------|-----------------|
| | 16 Ga. | 18 Ga. | Approx. Wt. | 16 Ga. | 18 Ga. | Approx. Wt. | 16 Ga. | 18 Ga. | Approx. Wt. | 16 Ga. | 18 Ga. | Approx. Wt. | Approx. Cu. Ft. |
| 24" | WS-10-24-16 | WS-10-24 | 8 lbs. | WS-12-24-16 | WS-12-24 | 9 lbs. | WS-15-24-16 | WS-15-24 | 11 lbs. | WS-18-24-16 | WS-18-24 | 14 lbs. | 3 |
| 30" | - | - | - | WS-12-30-16 | WS-12-30 | 12 lbs. | - | - | - | - | - | - | 4 |
| 36" | WS-10-36-16 | WS-10-36 | 10 lbs. | WS-12-36-16 | WS-12-36 | 12 lbs. | WS-15-36-16 | WS-15-36 | 15 lbs. | WS-18-36-16 | WS-18-36 | 21 lbs. | 4 |
| 42" | - | - | - | WS-12-42-16 | WS-12-42 | 14 lbs. | - | - | - | - | - | - | 5 |
| 48" | WS-10-48-16 | WS-10-48 | 12 lbs. | WS-12-48-16 | WS-12-48 | 14 lbs. | WS-15-48-16 | WS-15-48 | 18 lbs. | WS-18-48-16 | WS-18-48 | 24 lbs. | 5 |
| 60" | WS-10-60-16 | WS-10-60 | 15 lbs. | WS-12-60-16 | WS-12-60 | 17 lbs. | WS-15-60-16 | WS-15-60 | 23 lbs. | WS-18-60-16 | WS-18-60 | 28 lbs. | 6 |
| 72" | WS-10-72-16 | WS-10-72 | 17 lbs. | WS-12-72-16 | WS-12-72 | 21 lbs. | WS-15-72-16 | WS-15-72 | 28 lbs. | WS-18-72-16 | WS-18-72 | 32 lbs. | 7 |
| 84" | WS-10-84-16 | WS-10-84 | 20 lbs. | WS-12-84-16 | WS-12-84 | 25 lbs. | WS-15-84-16 | WS-15-84 | 32 lbs. | WS-18-84-16 | WS-18-84 | 36 lbs. | 8 |
| 96" | WS-10-96-16 | WS-10-96 | 23 lbs. | WS-12-96-16 | WS-12-96 | 28 lbs. | WS-15-96-16 | WS-15-96 | 36 lbs. | WS-18-96-16 | WS-18-96 | 42 lbs. | 10 |
| 108" | WS-10-108-16 | WS-10-108 | 28 lbs. | WS-12-108-16 | WS-12-108 | 32 lbs. | WS-15-108-16 | WS-15-108 | 40 lbs. | WS-18-108-16 | WS-18-108 | 48 lbs. | 11 |
| 120" | WS-10-120-16 | WS-10-120 | 32 lbs. | WS-12-120-16 | WS-12-120 | 36 lbs. | WS-15-120-16 | WS-15-120 | 44 lbs. | WS-18-120-16 | WS-18-120 | 54 lbs. | 12 |
| 132" | WS-10-132-16 | WS-10-132 | 36 lbs. | WS-12-132-16 | WS-12-132 | 42 lbs. | WS-15-132-16 | WS-15-132 | 49 lbs. | WS-18-132-16 | WS-18-132 | 60 lbs. | 13 |
| 144" | WS-10-144-16 | WS-10-144 | 40 lbs. | WS-12-144-16 | WS-12-144 | 48 lbs. | WS-15-144-16 | WS-15-144 | 55 lbs. | WS-18-144-16 | WS-18-144 | 66 lbs. | 14 |



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900


For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933

DETAILS and SPECIFICATIONS

TOL ± .500"


ALL DIMENSIONS ARE TYPICAL

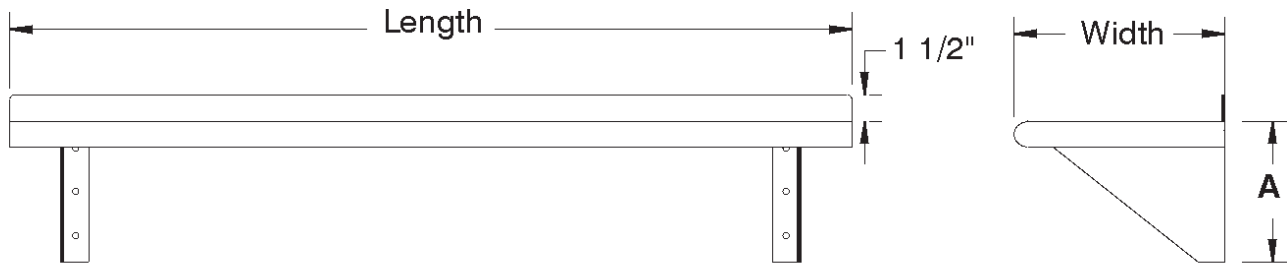

| Width | A |
|-------|---------|
| 10" | 8 1/2" |
| 12" | 10 1/2" |
| 15" | 13 1/2" |
| 18" | 16 1/2" |

Wall Shelf Options

| | |
|---------|--|
| PRT-1 | Printer Shelf |
| TA-22A | Square Edge Shelf |
| TA-26 | Welded Shelf Brackets |
| TA-49 | Wall Shelf 2" Offset |
| TA-71 | Heat Lamp Provision |
| TA-77 | Check Minder |
| TA-77A | Concealer for Heat Lamp (Requires TA-77) |
| TA-99A | 14 Ga. S/S 304 Upgrade for Overshelves |
| TA-100A | Bullnose Edge On All 4 Sides of Shelf |
| TA-102 | 6" Cantilever Shelf Offset |



Requirements for NSF Installations

1. Install at least 60" above floor.
2. Limit to dry storage.
3. Avoid contact with liquids.
4. For "Ganging-Up" installation, allow at least 2" between units or mount units side by side and seal joints with an approved sealant.

