Hoshizaki reserves the right to change specifications without notice.

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KMD-901M_H

MODULAR CRESCENT CUBER

KMD-901M_H
4/08
Item # 13221

CUBER DIMENSIONS
W x D x H

KMD-901M_H	30 x 24 5/8 x 28

KMD-901MWH
Water-Cooled
Shown on an optional
Lancer 30" Dispenser

KMD-901MRH
Remote Air-Cooled

- Up to 876 lbs. of ice production per 24 hours
- Ice on beverage design
- Durable stainless steel exterior
- Individual crescent cube
- Protected by *HoshiGuard* Antimicrobial Agent HOSHIGUARD
- CycleSaver® Design CYCLESAVER
- EverCheck® alert system evercheck
- Stainless steel evaporator
- R-404A Refrigerant
- Complies with California Energy Commission guidelines (CEC)

* The KMD-901MRH is ENERGY STAR certified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.
Five Year - Parts & Labor on: Evaporator.
Five Year - Parts on: Compressor, air-cooled condenser coil.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com

KMD-901M_H
MODULAR CRESCENT CUBER

DIMENSIONS
W x D x H
KMD-901M_H
30 x 24 5/8 x 28

- Water-cooled
- Remote Air-cooled

WATER-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	876	874	831
	80°	875	872	805
	90°	874	870	812

REMOTE AIR-COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	848	827	768
	80°	832	798	723
	90°	827	775	705

UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle Lbs.	Cubes	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs. 90/70	Condenser Water Gal. per 100 lbs. 90/70
KMD-901MWH	12.3	624	4.2	24.5	125
KMD-901MRH	12.0	624	5.3	20.0	N/A

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KMD-901MWH	Water-Cooled	7.8	20	251 lbs.
KMD-901MRH	Remote Air-Cooled	10.0	20	258 lbs.

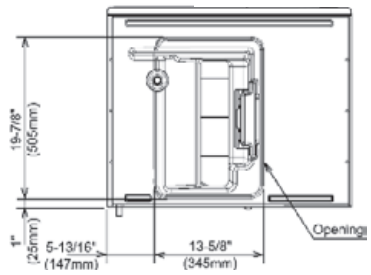

ICE DROP ZONE (KMD-901MWH & KMD-901MRH)



FRONT VIEW
(KMD-901MWH & KMD-901MRH)

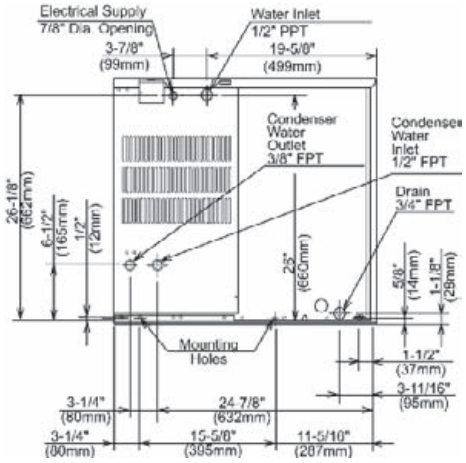

WATER-COOLED UNIT
(KMD-901MWH)

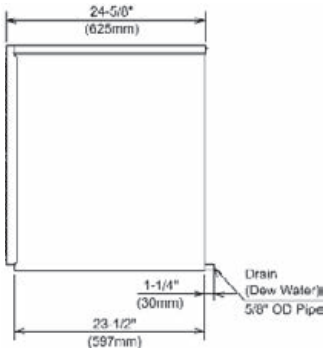

SIDE VIEW (KMD-901MWH
& KMD-901MRH Unit)

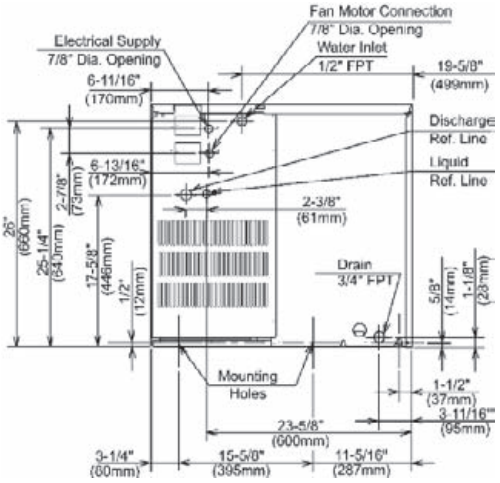

REMOTE AIR-COOLED UNIT
(KMD-901MRH)

URC-9F Remote Condenser (Sold Separately)
For Use with KM-901MRH



Pre-Charged Tubing Kits
(Sold Separately)
20' R404-2068-2
35' R404-3568-2

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

ELECTRICAL & PLUMBING/KMD-901M_H

- 208-230V/60/1 (3 wire with dedicated neutral for 115V)
- 20 amp Max Fuse/HACR Breaker Size
- 1/2" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection
- 5/8" OD pipe

OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	187 - 253V

CONDENSING UNIT

• Voltage Range	104 - 127V
• Ambient Temp Range	-22 - 122°F

SERVICE

- Panels easily removed and all components accessible for service.

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 1-800-438-6087 | FAX 1-800-345-1325 | www.hoshizaki.com | Printed in U.S.A.