Howard-McCray

34E Series – Endless Design
Double Duty – Fish and Poultry

• PRODUCT SPECIFICATIONS SHEETS

• Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

Self-Contained Remote	SC-CFS34E-4 R-CFS34E-4	SC-CFS34E-6 R-CFS34E-6	SC-CFS34E-8 R-CFS34E-8	SC-CFS34E-10 R-CFS34E-10	SC-CFS34E-12 R-CFS34E-12
Length with (2) ends	52-1/2"	76-1/2"	100-1/2"	124-1/2"	148-1/2"
Length without ends	48"	72"	96"	120"	144"
Height with ends	53-1/2"	53-1/2"	53-1/2"	53-1/2"	53-1/2"
Height without ends	53"	53"	53"	53"	53"
Depth with ends	34-1/2"	34-1/2"	34-1/2"	34-1/2"	34-1/2"
Depth without ends	34"	34"	34"	34"	34"
Depth with bottom door	37-1/2"	N/A	N/A	N/A	N/A
Endless Design	YES	YES	YES	YES	YES

(Dimensions are +/-1/4")

• Specification subject to change without notice

Howard-McCray

34E Series – Endless Design
Double Duty – Fish and Poultry

Standard Specifications and Optional Features

CONSTRUCTION
UL Classified to ANSI/NSF 7
Foamed in place CFC free foam
Triple pane insulated front glass-28"H
Heavy gauge steel super structure
Bottom storage
Endless design allows for continuous line up
Drain is included for cleaning

FINISHES
Satin finish extrusion on doors and door tracks
Designer white exterior front and ends
Stainless steel mirror trim
Stainless steel heavy gauge top – 19-1/2" W
Designer white exterior rear

INTERIOR
Designer white interior ends
White aluminum floor *(bottom storage area)*
Air insulated baffle *(prevents moisture from dripping into display area)*
Stainless steel individual ice pans

REFRIGERATION
Copevap system *(eliminates need for condensate pan)*
R134a expansion valve system
One Gravity coil located at inside top of unit
Self contained system
Automatic defrost controlled by time clock-*(self contained units only)*
Pressure control maintains constant temperatures
Remotes available

EXTERIOR
Double pane rear removable doors
Newly designed rear compression door jamb
Removable front grille allows for cleaning
Removable rear grille for easy servicing
2-1/4" removable end panels

LIGHTING
2 Rows of T12 lighting at top of unit

ELECTRICAL REQUIREMENTS
115V/60Hz/1Ph
Unit must be hard wired
UL/CUL listed
115V-12AMP general purpose receptacle *(wired separately)*

***Important Note:* All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.**

***Important Note:* Product must be cooled before being displayed within the case.**

***ICE REQUIRED* (32lbs per foot)**

NO COIL IN BOTTOM STORAGE AREA

OPTIONAL FEATURES

Scale Stand
Paper cutter
Painted, laminate or stainless steel
Mirrored doors
Stainless steel mezzanine shelf
Drop work shelf
Front bumpers 1" or 3"
Door lock
Digital thermometer
Pass thru front doors 4', 6' & 8' only
Bottom coil

c UL us LISTED
CLASSIFIED UL EPH ANSI/NSF 7

A Division of HMC Enterprises LLC • *2501 Grant Avenue • Philadelphia, PA 19114 USA*
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

Howard-McCray

34E Series – Endless Design
Double Duty – Fish and Poultry

Technical Data

Model	Self contained	SC-CFS34E-4	SC-CFS34E-6	SC-CFS34E-8	SC-CFS34E-10	SC-CFS34E-12
	Remote	R-CFS34E-4	R-CFS34E-6	R-CFS34E-8	R-CFS34E-10	R-CFS34-E-12
Length with (2) ends		52-1/2"	76-1/2"	100-1/2"	124-1/2"	148-1/2"
Length without ends		48"	72"	96"	120"	144"
Height with ends		53-1/2"	53-1/2"	53-1/2"	53-1/2"	53-1/2"
Height without ends		53"	53"	53"	53"	53"
Depth with ends		34-1/2"	34-1/2"	34-1/2"	34-1/2"	34-1/2"
Depth without ends		34"	34"	34"	34"	34"
Endless design		YES	YES	YES	YES	YES
(Dimensions are +/- 1/4")						
Operating temperature		38˚F to 40˚F	38˚F to 40˚F	38˚F to 40˚F	38˚F to 40˚F	38˚F to 40˚F
Refrigerant (expansion valve)	Self contained	R134a	R134a	R134a	R134a	R134a
Compressor size HP	Self contained	1/4	1/4	1/3	1/3	1/2
Pressure control settings						
@ 75˚F, 55%RH	CUT IN	30	30	30	30	30
	CUT OUT	15	15	15	15	15
Defrost per day (24 hours)	Air Defrost	1 per day	1 per day	1 per day	1 per day	1 per day
BTU's at +20˚F Evap. Temp.	Remote	820	1230	1640	2050	2460
Voltage		115V	115V	115V	115v	115V
Amperage	Self contained	6.0A	6.4A	9.1A	9.9A	13.8A
Amperage, lights only	Remote	0.8A	1.3A	1.6A	2.4A	2.4A
Cord and plug		No	No	No	No	No
Exterior color		White	White	White	White	White
Interior color		Stainless	Stainless	Stainless	Stainless	Stainless
Inside end panels		White	White	White	White	White
Floors		White	White	White	White	Anodized
Drain required	Self contained	Copevap	Copevap	Copevap	Copevap	Copevap
# of top doors		2	2	4	4	4
Door size		20-1/2"X23-1/2"	31"X23-1/2"	20-1/2"X23-1/2"	25-3/4"X23-1/2"	31"X23-1/2"
# of coils		1	1	1	1	1
Bottom storage		Yes	Yes	Yes	Yes	Yes
Front glass		28"X46-11/16"	28"X70-11/16"	28"X94-11/16"	28"X118-11/16"	28"X142-11/16"
Cubic capacity		30	45	60	75	90
Mezzanine- Shelf		Optional	Optional	Optional	Optional	Optional
# of ice pans		2	3	4	5	6

SHIPPING INFORMATION

Height		58"	58"	58"	58"	58"
Width		44"	44"	44"	44"	44"
Depth		61"	87"	109"	135"	157"
Gross weight	Self contained	530#	660#	880#	1150#	1411#
	Remote	497#	610#	820#	1089#	1359#
Cubic feet		89ft³	128ft³	164ft³	199ft³	231ft³

- **Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity**
- **Cases are equipped with drains; check your local building codes for connection requirements.**
- **Specification subject to change without notice**

A Division of HMC Enterprises LLC *• 2501 Grant Avenue • Philadelphia, PA 19114 USA*
(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

Howard-McCray

34E Series – Endless Design
Double Duty – Fish and Poultry

Technical Data • Side View • Plan View

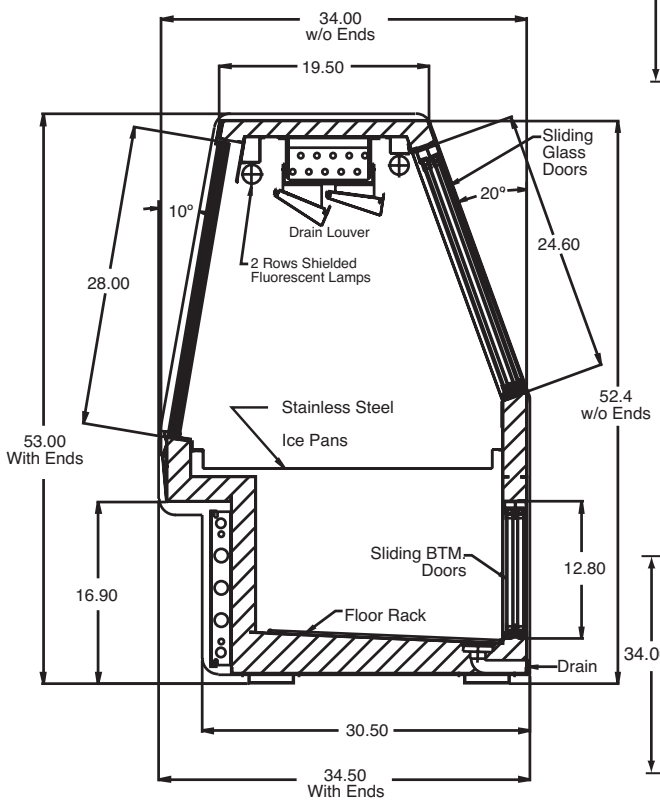

Cross Section

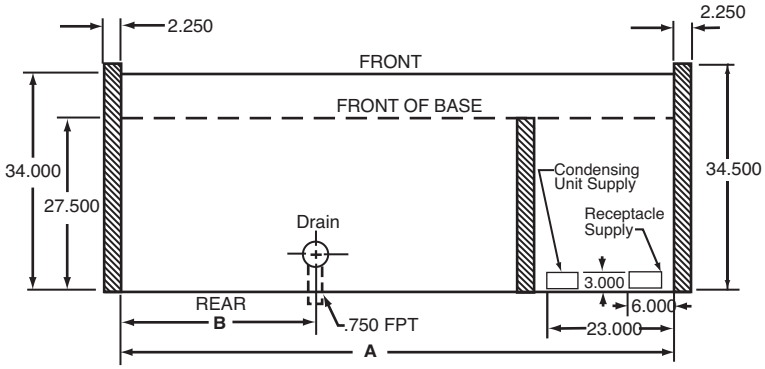

MODEL NO.	A	B
S/C-34E-4	48″	12″
S/C-34E-6	72″	24″
S/C-34E-8	96″	36″
S/C-34E-10	120″	48″
S/C-34E-12	144″	60″

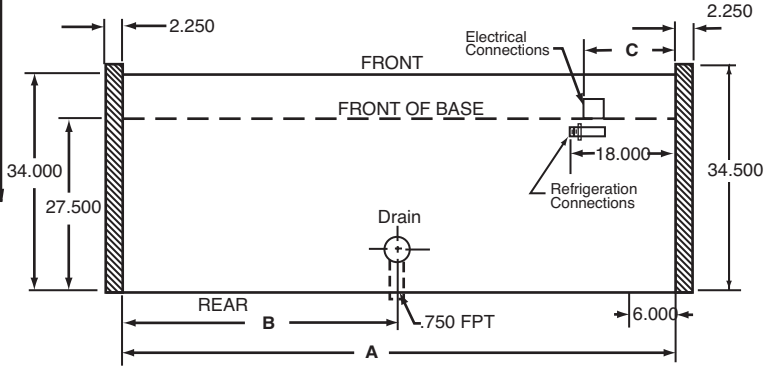

MODEL NO.	A	B	C
R-34E-4	48″	24″	4″
R-34E-6	72″	36″	4″
R-34E-8	96″	48″	52″
R-34E-10	120″	60″	52″
R-34E-12	144″	72″	76″

Plan Views

A Division of HMC Enterprises LLC • *2501 Grant Avenue • Philadelphia, PA 19114 USA*

(215) 464-6800 • 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com