

48" Refrigerated Display Cases

Models: SKRM48-RGUS10, SKRM48-RPUS10 115V/60HZ




Silver King® is the leader in reliable and energy efficient refrigeration solutions. Our sleek, stainless steel refrigeration equipment is made with the highest quality materials to guarantee everything is kept fresh and meets temperature standards. Our equipment has polyurethane insulation for maximum strength and durability, and minimal energy waste.

Standard Features

- Exterior stainless steel with galvanized bottom reduces risk of corrosion.
- Interior aluminum, coved corners and finished edges for easy cleaning.
- Environmentally friendly polyurethane foamed-in-place insulation for maximum strength and durability.
- Supplied with adjustable 4" legs. Also can be wall mounted.
- Standard 8 foot 3 wire power cord with NEMA 5-15P plug.
- Double pane, vapor sealed, self-closing glass doors on roller bearings for smooth operation. Easily removed for cleaning.
- Adjustable temperature control mounted on the side for easy access.
- CFE-free, hermetically sealed, high efficiency, self contained refrigeration system with automatic defrost and forced air circulation.
- Adjustable shelves are hand dipped, not sprayed, providing double thick epoxy coating for superior durability and smooth finish. Adjustable in 1/2" increments on stainless steel pilasters.
- Automatic condensate evaporator means no plumbing or floor drains.
- Optional wall mount kit #10314-50 available for SKRM48-RGUS10.
- Limited Warranty: 1-year labor, 1-year parts, 5-year compressor (part only), 90-days replacement parts. Warranty is determined by the original equipment manufacturing date for general market.*

Specifications

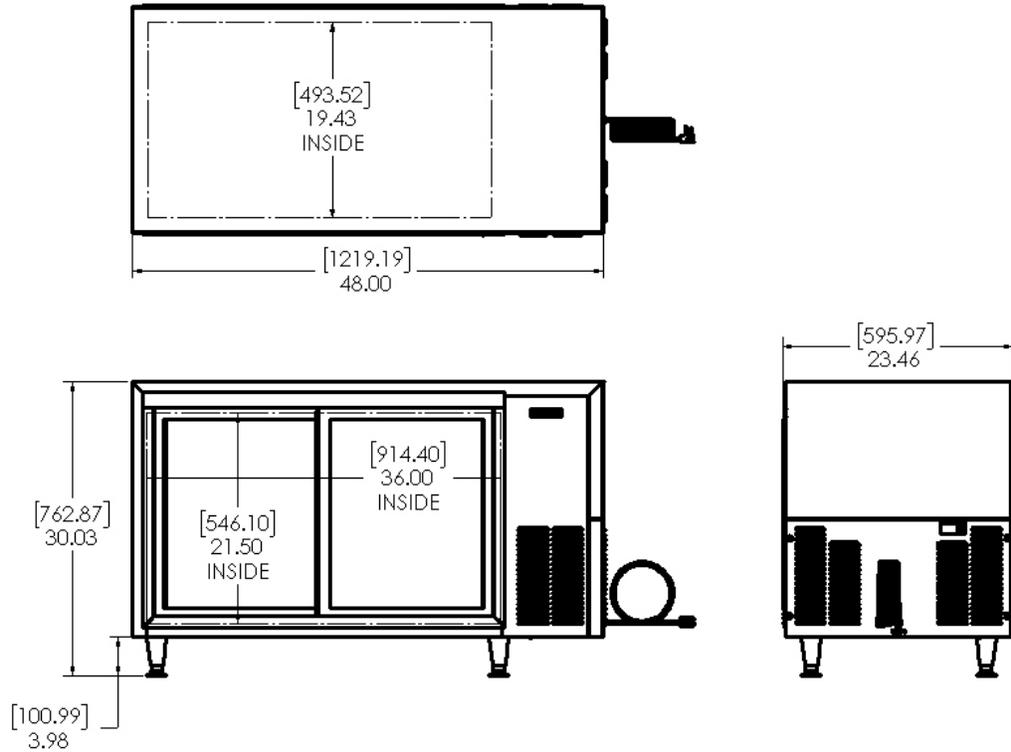

Dimensions

Model Number	Width in (mm)	Height in (mm)	Depth in (mm)	Gross Shipping Weight lb (kg)	Unit Net Weight lb (kg)	Shipping cu ft (cu m)	Additional Features
SKRM48-RGUS10	48 (1219.19)	30.03 (762.87)	23.46 (595.97)	245 (111.13)	230 (104.33)	36.50 (1.03)	Mirrored Effect
SKRM48-RPUS10	48 (1219.19)	30.04 (762.87)	23.46 (595.97)	245 (111.13)	230 (104.33)	36.50 (1.03)	Pass Through

Electrical

Model Number	Country of Origin	Amps	Voltage	Hz	Plug	Refrigerant
SKRM48-RGUS10	USA	3.9	120 VAC	60	NEMA 5-15P	134a
SKRM48-RPUS10	USA	3.9	120 VAC	60	NEMA 5-15P	134a

Certifications

