



Item # _____

Project _____

Date _____

Model # D35 Triple Bowl Premix Dispensers Features



- Famous two-piece, stainless steel, dripless pouring valves are sanitary and easy to use and maintain.
- Better design and more stainless steel allow easier cleaning and less maintenance.
- Superior engineering allows full beverage cooling right down to the last drink.
- Large, 5 gallon bowls, with easy to read measuring marks, are separate to allow bowl cleaning and flavor changes without "total system shut-down".
- Super-strong, virtually unbreakable polycarbonate bowls and covers give lasting durability.
- Unique evaporator and high efficiency pump cools faster and more efficiently for faster start-ups.
- Choice of Regular (-4) or optional Stainless Steel (-3) side panels and drain trays.
- Down-to-earth design engineering makes routine servicing easier and simpler.
- Second-to-none quality with "field condition" testing.
- Optional whipper for frothed drinks.
- Agitators are included with each unit for fresh juices, coffees or teas.
- World-wide sales and service assure customer satisfaction.




GRINDMASTER™
CORPORATION



Grindmaster® Coffee Grinders and Brewers • PrecisionBrew™ Brewing Systems • Espresso® Espresso Machines
Crathco® Hot Beverage Dispensers • Crathco® Cold and Frozen Beverage Dispensers • AMW Coffee and Tea Systems
Tel (502) 425-4776 • Fax (502) 425-4664 • 1-800-695-4500 (USA & Canada only)
P.O. Box 35020 • Louisville, KY 40232 • USA
www.grindmaster.com • email: info@grindmaster.com

Crathco® Model # D35 Triple Bowl

Premix Dispensers

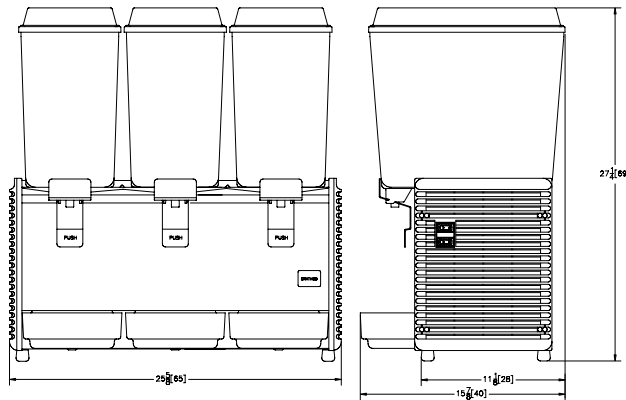

Specifications	D35 (115V/60Hz)	D355 (230V/50Hz)	D356 (230V/60Hz)
# Bowls	3	3	3
Bowl Capacity	5 gallons (18.9L)	5 gallons (18.9L)	5 gallons (18.9L)
Refrigeration	1/3 hp	1/3 hp	1/3 hp
Volts / Hz / Amps	115V / 60Hz / 8.5Amp	230V / 50Hz / 4.3Amp / 989 Watts	230V / 60Hz / 4.3Amp / 989 Watts
Dimensions (H x W x D)	27 1/4" x 25 5/8" x 15 7/8" (69 cm x 65 cm x 40 cm)	27 1/4" x 25 5/8" x 15 7/8" (69 cm x 65 cm x 40 cm)	27 1/4" x 25 5/8" x 15 7/8" (69 cm x 65 cm x 40 cm)
Ship Weight (2 boxes)	95 lbs (base: 71, bowls: 24) 43 kg (base: 32.2, bowls: 10.8)	95 lbs (base: 71, bowls: 24) 43 kg (base: 32.2, bowls: 10.8)	95 lbs (base: 71, bowls: 24) 43 kg (base: 32.2, bowls: 10.8)
Cup Height	8-1/4" (21 cm)	8-1/4" (21 cm)	8-1/4" (21 cm)
Listings	UL, NSF, CUL	NSF, CE	NSF, CE

Specifications are subject to improvement or change without notice.

Standard Options*	
Side panels & drip tray	-3 Stainless steel material (additional charge), -4 off-white high impact plastic (standard - no additional charge)
Valve cap (part# 2039)	Improves sealing of valve when using pulpy products
Valve locking box (part# 2502) (use w/ standard handle)	Secures the valve from dispensing during off-hours - not to be used with non-contact handle
Liquid Auto Fill (part# 90295)	Ensures proper product and mixing consistency, maintains optimum product level in bowls, eliminates need for frequent manual mixing
Shipboard kit (part# 5925)	Makes unit safer for installation aboard marine vessel; only available for use with agitator
Milk Fat Impellers	Use with milk-based products, and/or products with heavy pulp
Condensation Control	Direct and conceal condensation in high humidity or outdoor locations

Custom Options* (available with minimum purchase quantity)	
Frosted Bowls 5 gal. (18.9L)	Frosted surface simulates condensation while helping hide product residue and offering added UV protection.
Frosted Lid	Lid with frosted surface for use with 5 gallon (18.9L) frosted bowls
Whippers (must be ordered when ordering machine) (see models in spec chart below)	Great for iced cappuccinos and iced coffee. Whips beverage upon dispensing to create a frothy top on drink.

Specifications	1WD35 (115V/60Hz)	2WD35 (115V/60Hz)	3WD35 (115V/60Hz)	1WD355 (230V/50Hz)	2WD355 (230V/50Hz)	3WD355 (230V/50Hz)
Whipper Models	(3 bowls - 1 whipper)	(3 bowls - 2 whippers)	(3 bowls - 3 whippers)	(3 bowls - 1 whipper)	(3 bowls - 2 whippers)	(3 bowls - 3 whippers)
Bowl Capacity	5 gallons (18.9L)	5 gallons (18.9L)	5 gallons (18.9L)	5 gallons (18.9L)	5 gallons (18.9L)	5 gallons (18.9L)
Refrigeration	1/3 hp	1/3 hp	1/3 hp	1/3 hp	1/3 hp	1/3 hp
Volts / Hz / Amps	115V / 60Hz / 9.1Amp	115V / 60Hz / 9.7Amp	115V / 60Hz / 10.3Amp	230V / 50Hz / 4.6Amp	230V / 50Hz / 4.9Amp	230V / 50Hz / 5.2Amp
Dimensions (H x W x D)	29 3/4" x 25 5/8" x 15 7/8" (76cm x 65cm x 40cm)	29 3/4" x 25 5/8" x 15 7/8" (76cm x 65cm x 40cm)	29 3/4" x 25 5/8" x 15 7/8" (76cm x 65cm x 40cm)	29 3/4" x 25 5/8" x 15 7/8" (76cm x 65cm x 40cm)	29 3/4" x 25 5/8" x 15 7/8" (76cm x 65cm x 40cm)	29 3/4" x 25 5/8" x 15 7/8" (76cm x 65cm x 40cm)
Ship Weight	97 lbs (74 lbs, 23 lbs) 44 kg (33.5 kg, 10.5 kg)	98 lbs (76 lbs, 22 lbs) 44.5 kg (34.5 kg, 10 kg)	100 lbs (78 lbs, 22 lbs) 45.4 kg (35.4 kg, 10 kg)	97 lbs (74 lbs, 23 lbs) 44 kg (33.5 kg, 10.5 kg)	98 lbs (76 lbs, 22 lbs) 44.5 kg (34.5 kg, 10 kg)	100 lbs (78 lbs, 22 lbs) 45.4 kg (35.4 kg, 10 kg)
Cup Height	5-1/2" (14 cm)	5-1/2" (14 cm)	5-1/2" (14 cm)	5-1/2" (14 cm)	5-1/2" (14 cm)	5-1/2" (14 cm)
Listings	UL, NSF, CUL	UL, NSF, CUL	NSF, UL, CUL	NSF, CE	NSF, CE	NSF, CE

* Additional cost applies

Specifications are subject to improvement or change without notice.



Tel (502) 425-4776 • Fax (502) 425-4664 • 1-800-695-4500 (USA & Canada only)
P.O. Box 35020 • Louisville, KY 40232 • USA

© Grindmaster Corporation, 2002
Printed in USA

www.grindmaster.com • email: info@grindmaster.com

0608 Form # CC-277-05

Tundra Specialties