

NOR-LAKE, INCORPORATED
 727 Second Street
 P.O. Box 248
 Hudson, Wisconsin 54016

800-955-5253
 715-386-2323
 866-961-5253 Parts
 800-388-5253 Service
 715-386-6149 FAX
 www.norlake.com



ADVANTEDGE™ REACH-IN FREEZERS



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

1, 2 & 3 DOOR ADVANTEDGE™ FREEZERS

SPECIFICATIONS FOR: NLF23-S, NLF49-S, NLF72-S

- **Exterior finish:** Exterior front, sides and doors are stainless steel. The exterior top, bottom and back are galvanized steel.
- **Interior finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** The complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self adjusting magnetic gaskets; 4" dia. casters (4 casters on one and two door models and 6 casters on three door model). 4 vinyl coated shelves per door section - standard.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door frame heater wires. An interior incandescent light is activated by a switch for each door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Refrigerant flow is controlled by a capillary tube. R-404A refrigerant. Operating temperature: -5°F.
- **Approvals:**
 - UL listed
 - C-UL listed **
 - ETL Sanitation
 - ENERGY STAR®

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Door opening heaters
- Interior light
- Key locks


OPTIONAL FEATURES

- Magnetic gasket
- Microprocessor with digital display
- Operating temperature: -5°F
- Polyurethane insulation
- R-404A refrigerant
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation & ENERGY STAR®
- Warranties: 1 year parts/labor/service 5 year compressor
- Extra shelves
- Pan slide rack (part # 146515)
- Field reversible hinging for single door models




Nor-Lake, Inc.
 Registered to ISO 9001:2008
 File No. 10001816


** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.




NLF23-S Top View




NLF49-S Top View

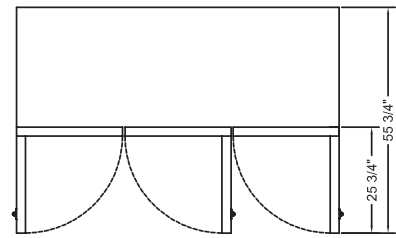


NLF72-S Top View

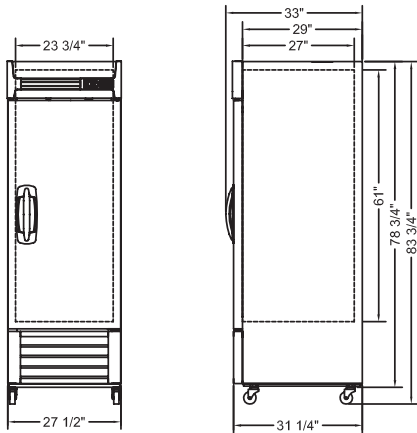

NLF23-S Front and Side Views

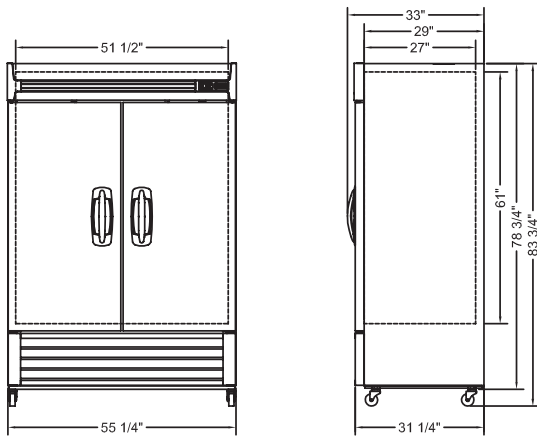

NLF49-S Front and Side Views

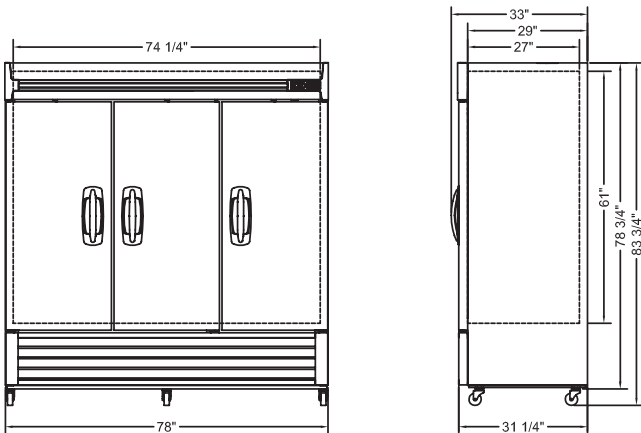

NLF72-S Front and Side Views

SPECIFICATIONS

	<i>NLF23-S</i>	<i>NLF49-S</i>	<i>NLF72-S</i>
<i>Crated Height</i>	84-1/4"	84-1/4"	84-1/4"
<i>Crated Width</i>	29-1/8"	56-3/4"	78-3/8"
<i>Crated Depth</i>	33-1/2"	33-1/2"	33-1/2"
<i>Crated Weight (lbs)</i>	308	483	653
<i>Interior Height (in)</i>	61"	61"	61"
<i>Interior Width (in)</i>	23-3/4"	51-1/2"	74-1/4"
<i>Interior Depth (in)</i>	27"	27"	27"
<i>Overall Height (in)</i>	83-3/4"	83-3/4"	83-3/4"
<i>Overall Width (in)</i>	27-1/2"	55-1/4"	78"
<i>Overall Depth (in)</i>	33"	33"	33"
<i>Gross Cubage (ft.³)</i>	23	49	70
<i>Number of Shelves</i>	4	8	12
<i>Number of Casters</i>	4	4	6
<i>Condensing Unit Size</i>	1/2 HP	3/4 HP	1.1 HP
<i>Refrigerant</i>	R-404A	R-404A	R-404A
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/208-230/60/1
<i>Cord & Plug Furnished</i>	Yes	Yes	Yes
<i>NEMA Plug Configuration</i>	5-15P	5-15P	14-20P
<i>Total Amp Draw</i>	8.5	9.5	9.0

* The overall heights shown in the table and drawings are with casters.
Specifications subject to change without notice.



Revision Date: 11/10
© 2010 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 138687

