
Sakura Sushi Cases

Self Contained, Refrigerated Sushi Cases

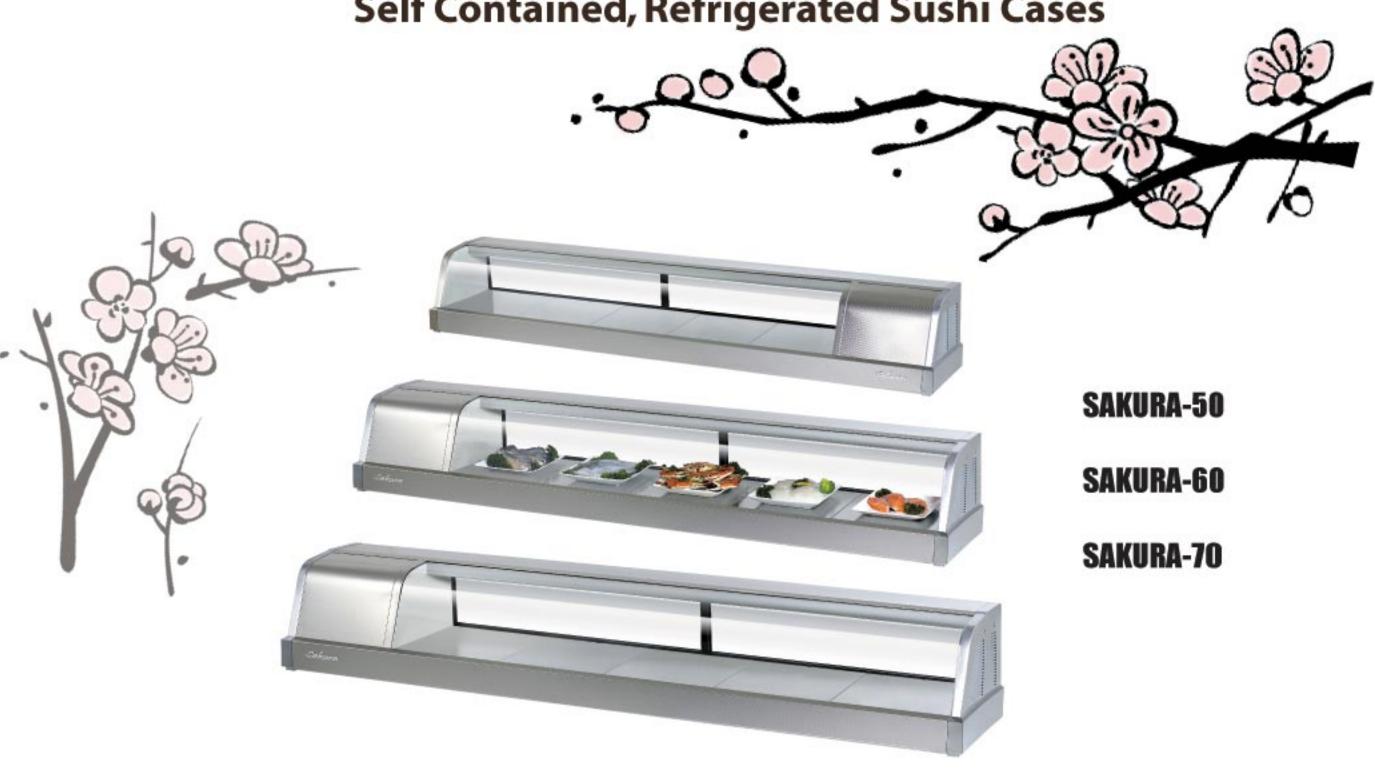

IN CELEBRATION OF OUR 10TH ANNIVERSARY, TURBO AIR IS PROUD TO INTRODUCE OUR UPCOMING NEW SUSHI CASE PRODUCT Sakura.

FOR ALL THESE YEARS, WE AT TURBO AIR HAVE BEEN TRYING HARD TO MEET OUR CUSTOMER'S EXPECTATIONS AND NOW Sakura HAS BECOME THE KIND OF PRODUCT WE CAN CONFIDENTLY PRESENT TO YOU, OUR VALUED CUSTOMERS.

> WE DESIGNED IT FOR THE FUTURE AND TOOK AN ENTIRELY **NEW APPROACH IN ITS TECHNOLOGY.**

ITS INNOVATIVE DESIGN AND NEW TECHNOLOGY WILL POSITION Sakura AS THE LEADER IN SUSHI CASE PRODUCTS FOR MANY YEARS TO COME.





Model	SAKURA-50	SAKURA-60	SAKURA-70
Exterior Dimensions(LxDxH)	47.2 x 13.9 x 11.4	59.0 x 13.9 x11.4	70.0 x 13.9 x11.4
Interior Dimensions(LxDxH)	33.3 x 12.0 x 6.5	45.1 x 12.0 x 6.5	56.9 x 12.0 x 6.5
CU./FT.	1.49	2.02	2.55
Compressor	1/6	1/6	1/6
Power Voltage	115V/60HZ	115V/60HZ	115V/60HZ
AMP	2.5A	2.5A	2.5A
Plug-in Installaion	NEMA 5-15	NEMA 5-15	NEMA 5-15
Shelves	-	_	-
Shelf Size	-	2	_
Weight(Ibs)	74	83	92




COMMERCIAL REFRIGERATOR

SAK-XXX



- 1) ETL. ETL sanitation approved
- 2) Fin type evaporator
- 3) Bottom shelf SUS 304
- 4) R-134a Refrigerant
- 5) Top glass angles down
- 6) Self-contained refrigeration unit-easy to install
- 7) Large diameter 1 inch drains

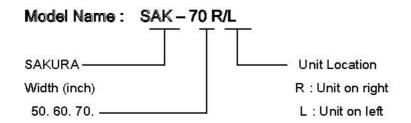











COMMERCIAL REFRIGERATOR

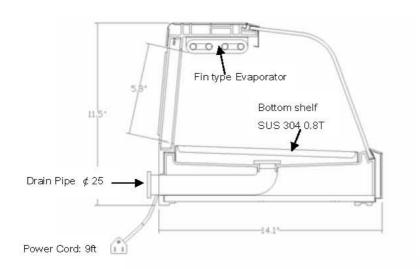

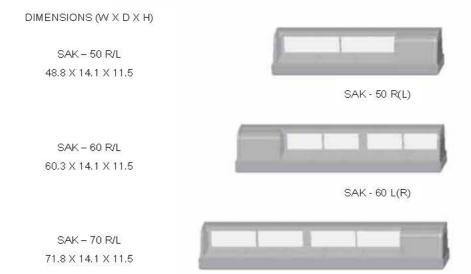

SAK - 70 R(L)

SPECIFICATION

	Electrical Rating	Net Capacity	Sliding Door	Bottom shelf (EA)	Weight (lbs)
SAK - 50 R/L	AC 120V 1ph, 60Hz 3A	1.3ਿ€	2Pieces	3	76.06
SAK - 60 R/L		1.7 ft°	4 Pieces	5	87.08
SAK - 70 R/L		2.1 ft*	4 Pieces	5	98.01

Ambient Temp Range 50 ~ 80°F, Saturation Temp 39°F





