

Features



Titan Dual Brewer

- Brews 34.3 gallons (129.8 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER™ allows automatic programming of pulse routine.
- SplashGard® funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 litre) capacity and paper filter retainers to eliminate fold-over.
- ThermoFresh® servers are insulated to keep coffee hot and fresh for hours.
- Left or right faucet for hot water.

Model Titan Dual Brewer with 3 gallon TF Servers *(servers sold separately)*

Dimensions: 40.02" H x 35.63" W x 21.74" D
(101.7cm H x 90.5cm W x 55.2cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-54
Product No. : 39000.0006



Easy Clear® EQHP-54L
Product No. : 39000.0003

Titan/Urn Filter Pack
Product No. : 20111.0000
Packed per case: 250
Dimensions:
20" Base x 8" Sidewall
50.8 cm Base x 20.3 cm Sidewall



Titan TF Server
Product No.: 39400.0000
3 gallon, Mechanical Gauge



Titan Funnel
Product No.: 40105.0000
(boxed)



Model

Titan Dual

Agency Listing



Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Funnel Locks	Cord Attached
Titan Dual	39200.0000	120/208	28.9	12000	34.3 gal/hr	27	148 lbs.	Yes	No
		(3-phase)							
		*120/208	38.5	8000	22.9 gal/hr	27	148 lbs.	Yes	No
		(single-phase)							


Brewing capacity: based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 120/208V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting.

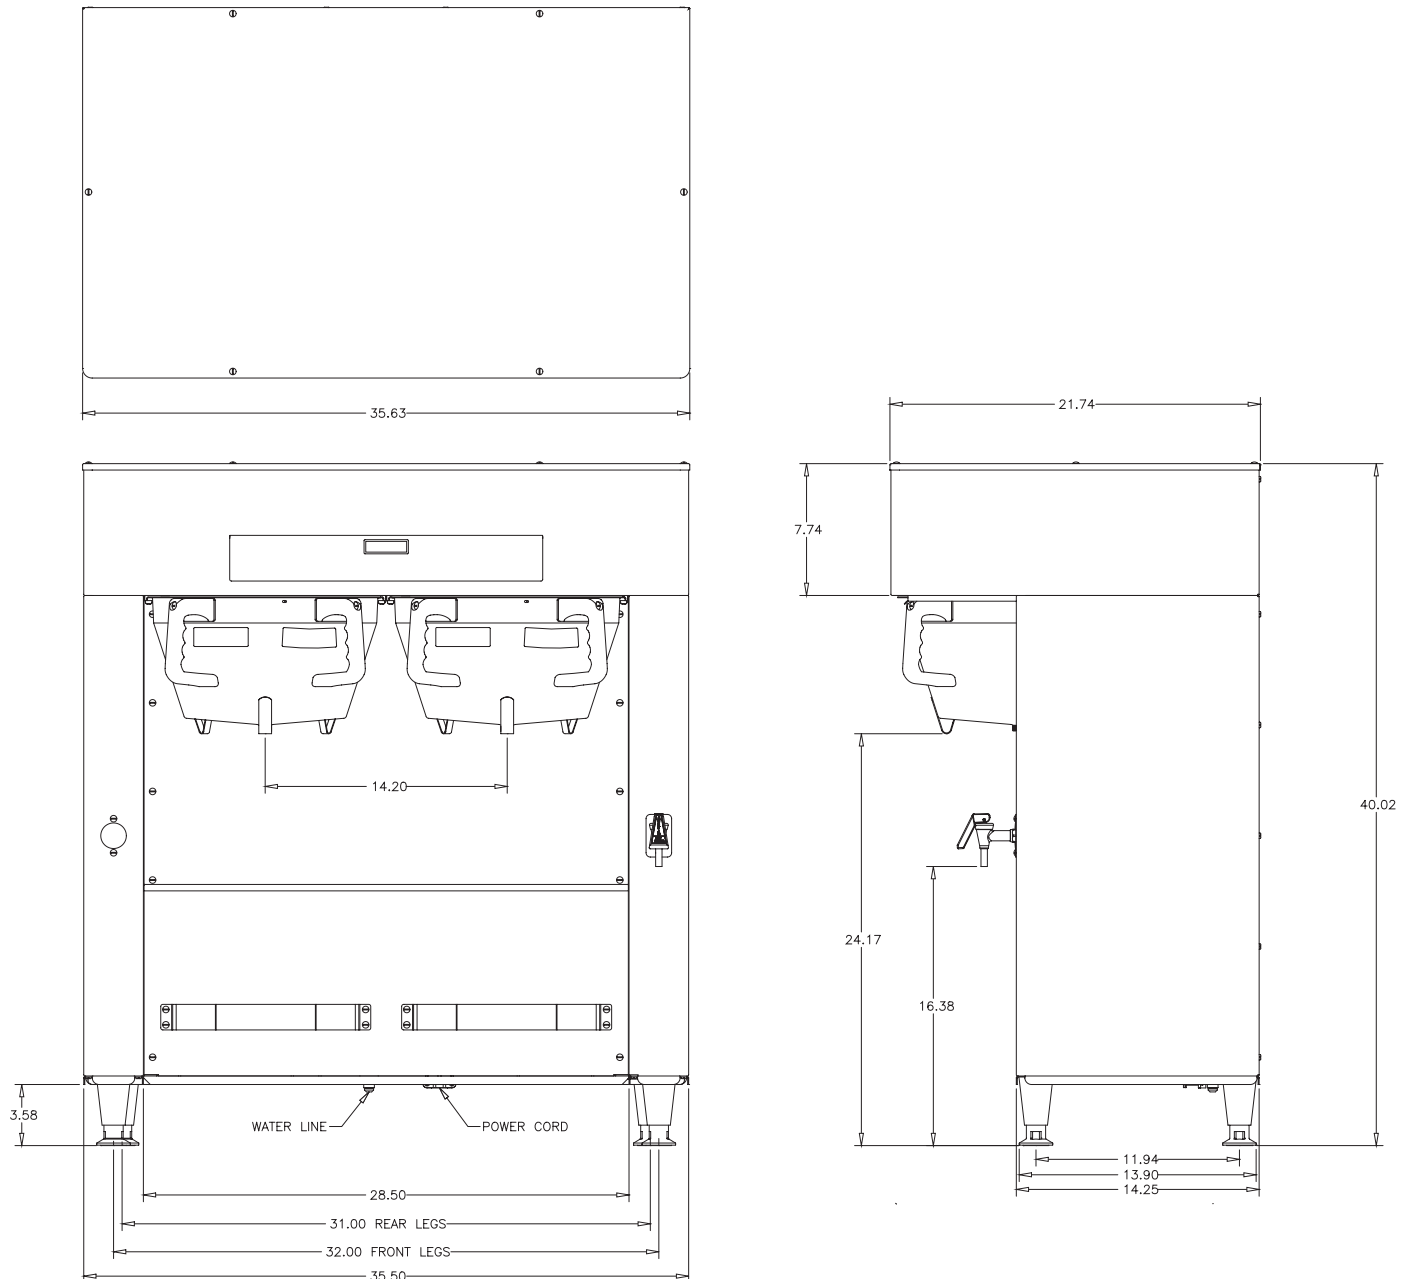

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

10/07 © Bunn-O-Matic Corporation